

Impact of ethanol and butanol as oxygenates on SIDI engine efficiency and emissions using steady-state and transient test procedures

Thomas Wallner, Neeraj Shidore, Andrew Ickes
Argonne National Laboratory

16th Directions in Engine-Efficiency and Emissions Research (DEER) Conference
Detroit, Michigan

September 27-30, 2010


Acknowledgements

- Co-Authors
 - Thomas Wallner
 - Neeraj Shidore

- Support and assistance from the Department of Energy
 - Connie Bezanson
 - Lee Slezak
 - Kevin Stork
 - Gupreet Singh



Background & Motivation

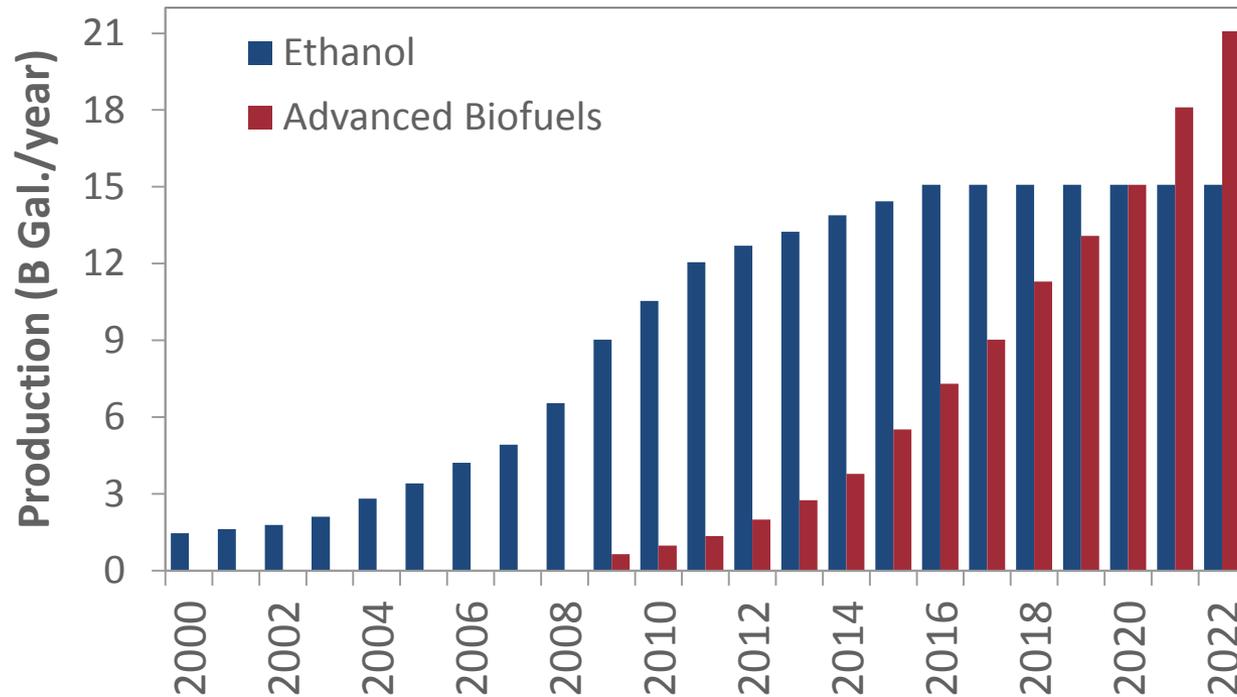

Adapted from:
Renewable Fuels Standard
(*Federal Register*, 75(58))

U.S. Renewable Fuel Standard requires an increase of ethanol and advanced biofuels to 36 billion gallons by 2022.



Iso-Butanol as possible advanced biofuel?

Objectives



- Assess the potential of blending gasoline with several alcohol fuels for use in a gasoline direct injection (DI) spark ignition (SI) engine.





- Evaluate the effect of ethanol and butanol addition on regulated and non-regulated emissions compared to gasoline baseline.



- Utilize Engine Hardware-In-Loop capability to characterize emissions trends over a simulated test cycle.

Fuel Specifications

		Gasoline	Ethanol	iso-Butanol
Chemical formula		$C_4 - C_{12}$	C_2H_5OH	C_4H_9OH
Composition (C, H, O)	Mass-%	86, 14, 0	52, 13, 35	65, 13.5, 21.5
Lower heating value	MJ/kg	42.7	26.8	33.1
Density	kg/m ³	715 - 765	790	802
Octane number ((R+M)/2)	-	90	100	103
Stoichiometric air/fuel ratio	-	14.7	9.0	11.2
Latent heat of vaporization	kJ/kg	380 – 500	919	686

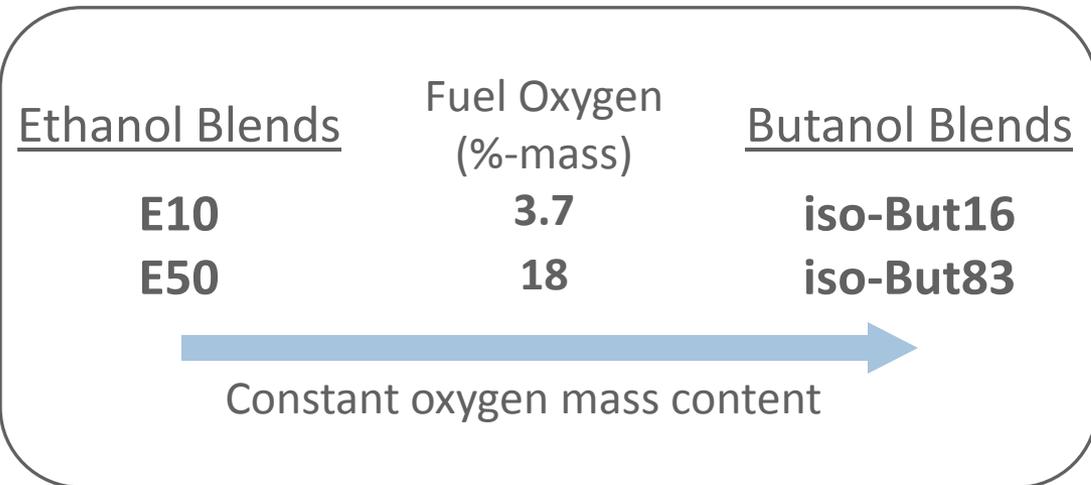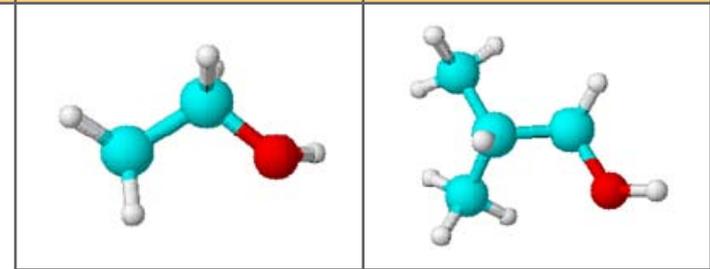

Blend lower heating values

Gasoline: 42 MJ/kg
 E10/B16: 41 MJ/kg
 E50/B83: 35 MJ/kg

Experimental Methods - Steady State Testing



■ Typical vehicle operating points

- Constant speed
- Constant load
- Constant power


■ Engine-out (no TWC) emissions

■ Opel 2.2 I Ecotec Direct (GM L850)


- SIDI 4-Cylinder Engine, no VVA
- ECU calibrated for gasoline

■ Emissions measurement

- Horiba MEXA Model 7100D-EGR
- AVL Sesam FTIR

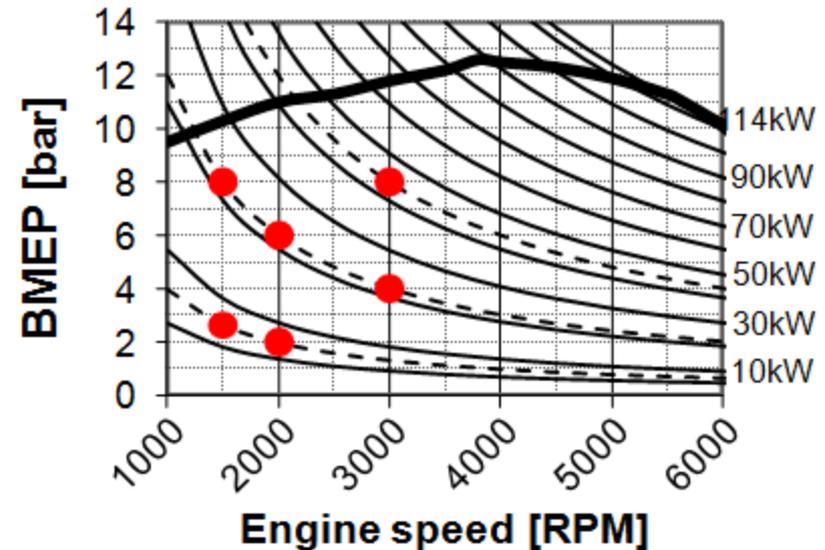


Regulated Emissions

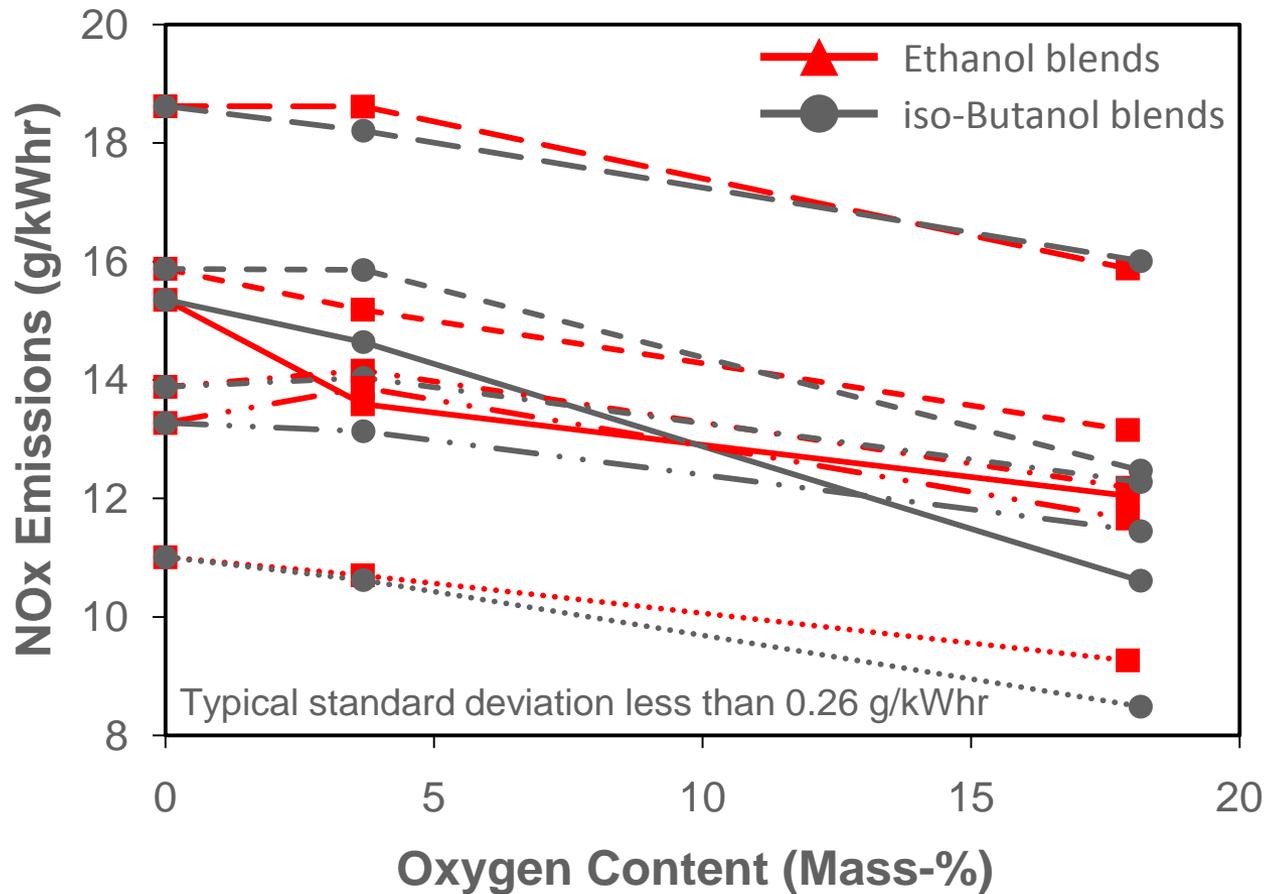

NOx decreases with increasing fuel alcohol and oxygen content


Speciated Hydrocarbons (from FTIR)

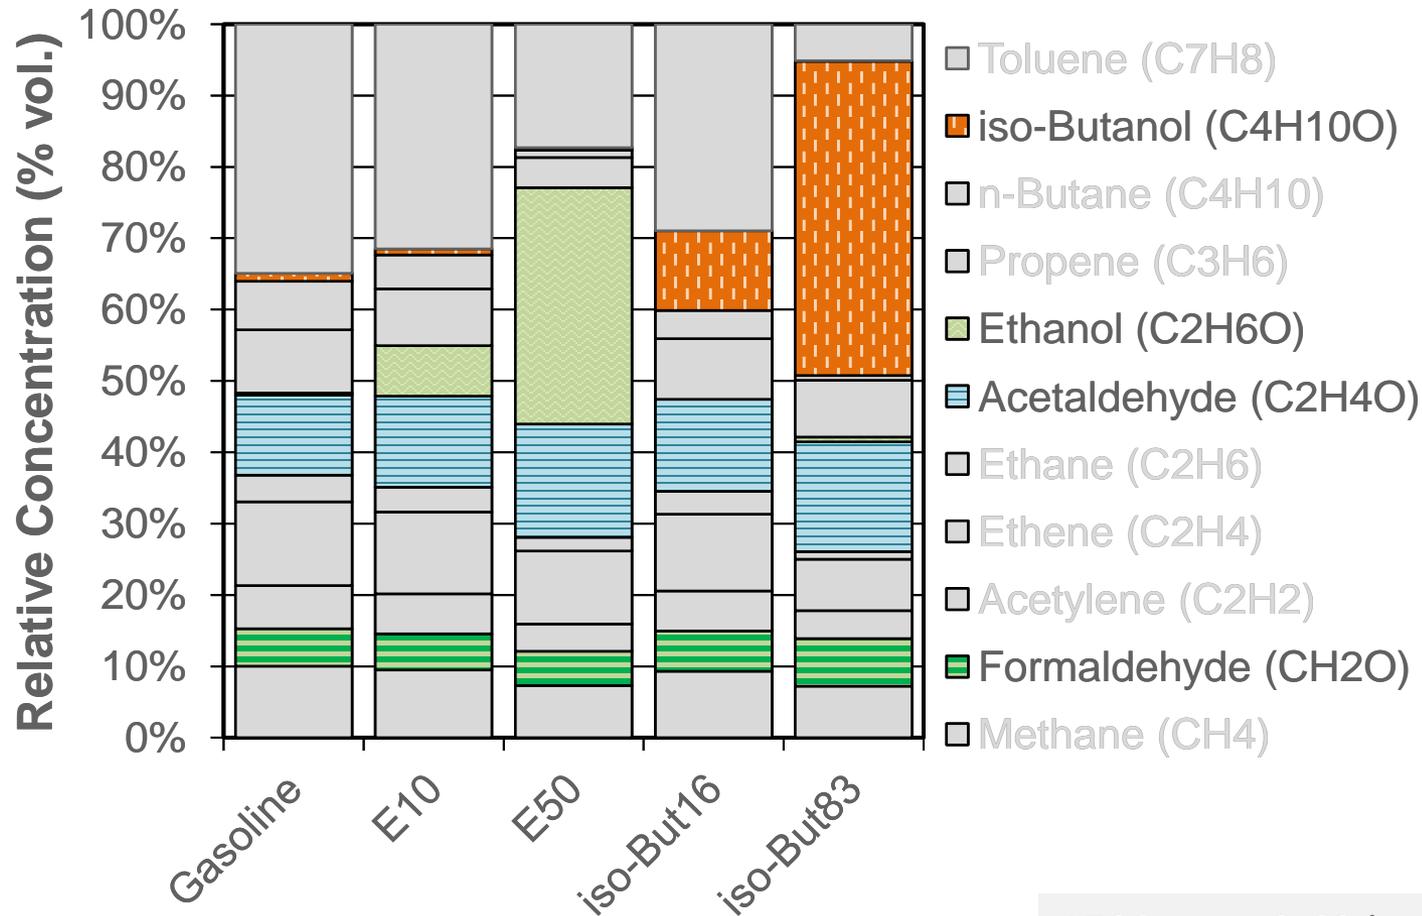

1500 rpm, 2.62 bar BMEP




Formaldehyde Emissions

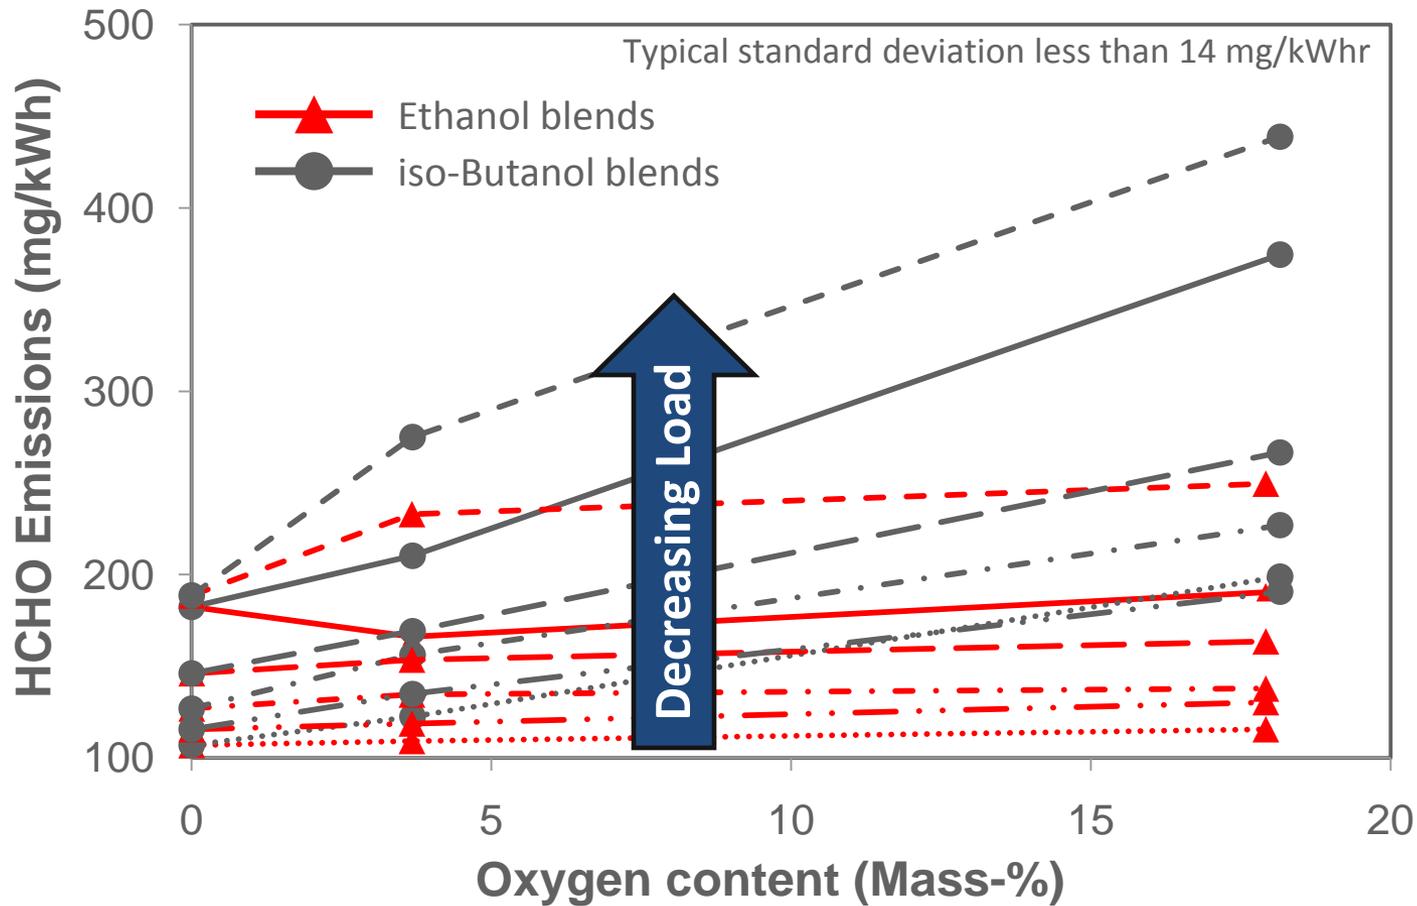



Increased formaldehyde with *iso*-butanol blends, but not with ethanol blends

Acetaldehyde Emissions

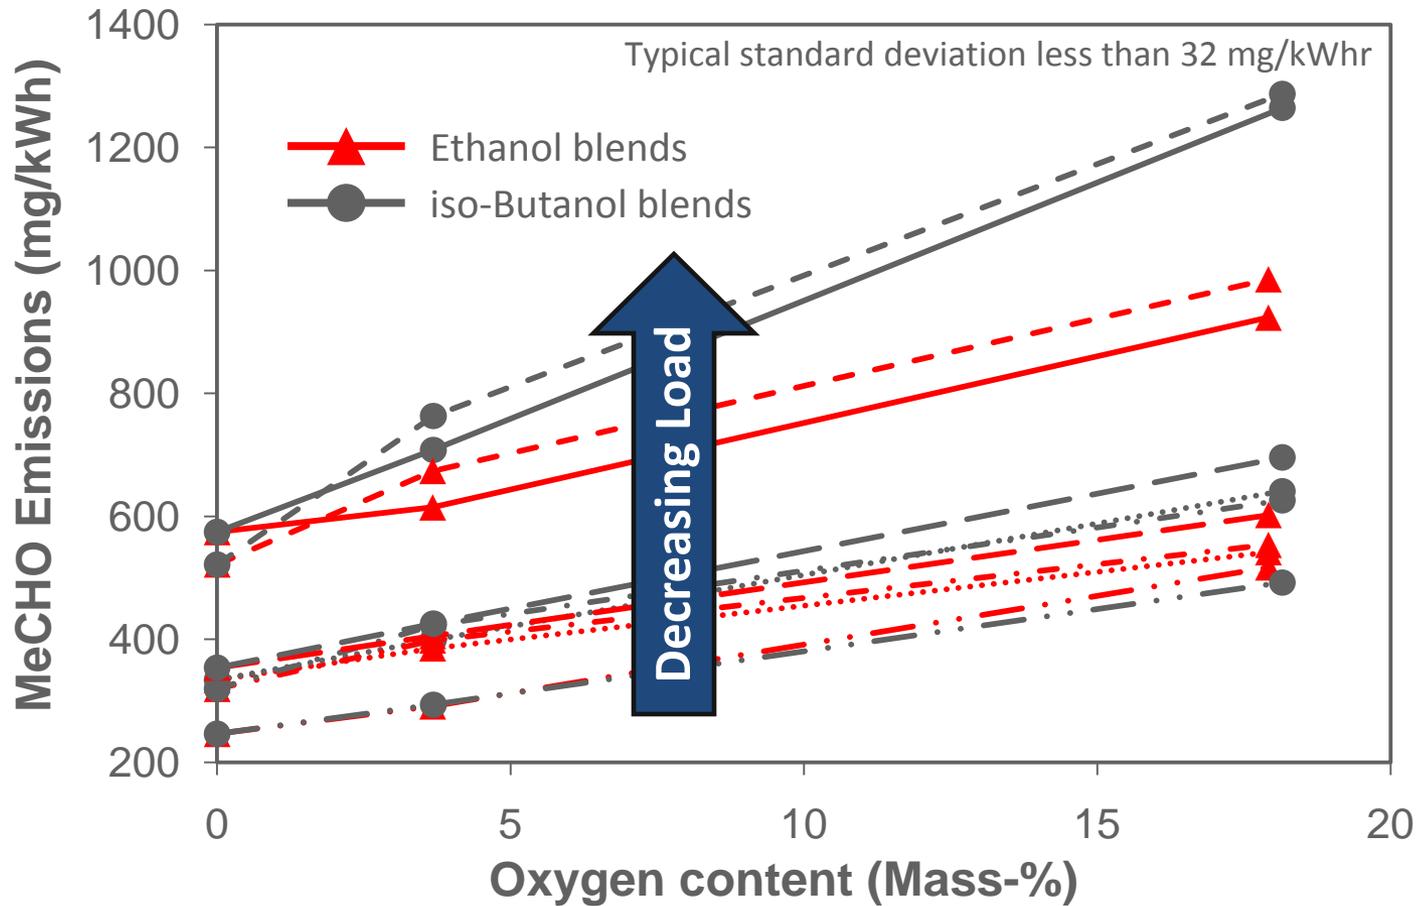


Increased acetaldehyde with both ethanol and *iso*-butanol blends

Engine Hardware-In-Loop Concept

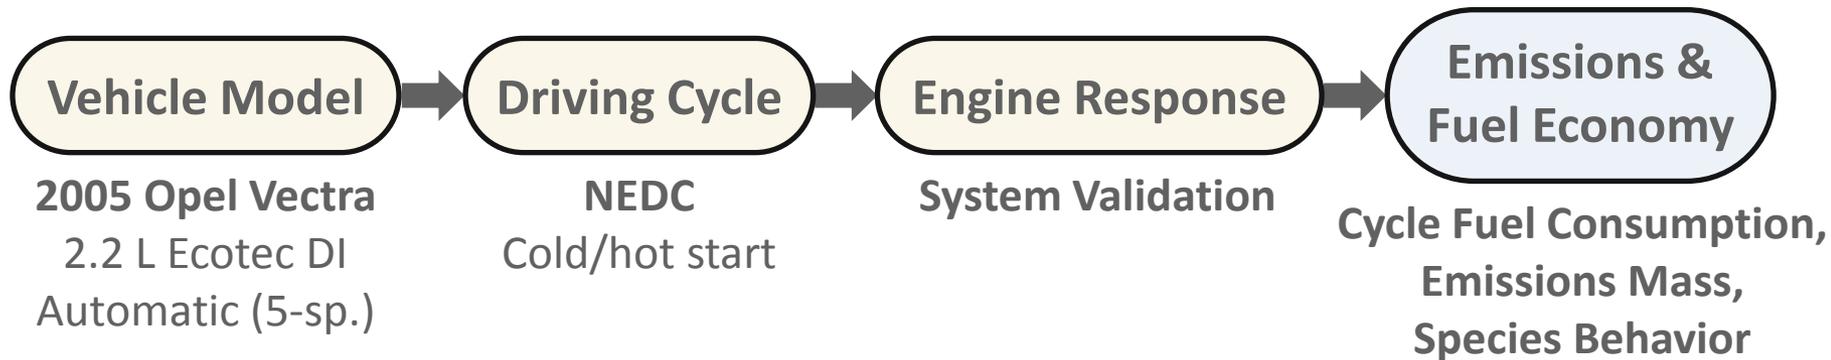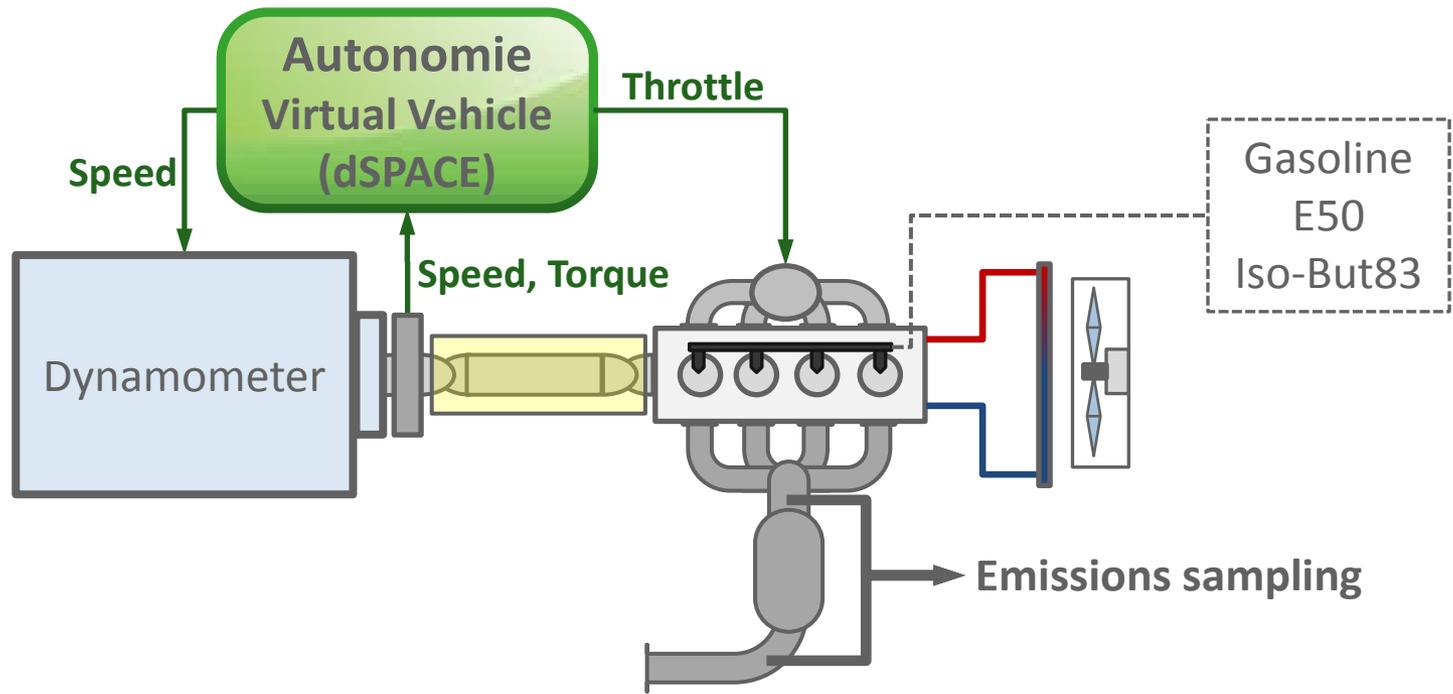

Experimental Methods: Engine HIL Testing

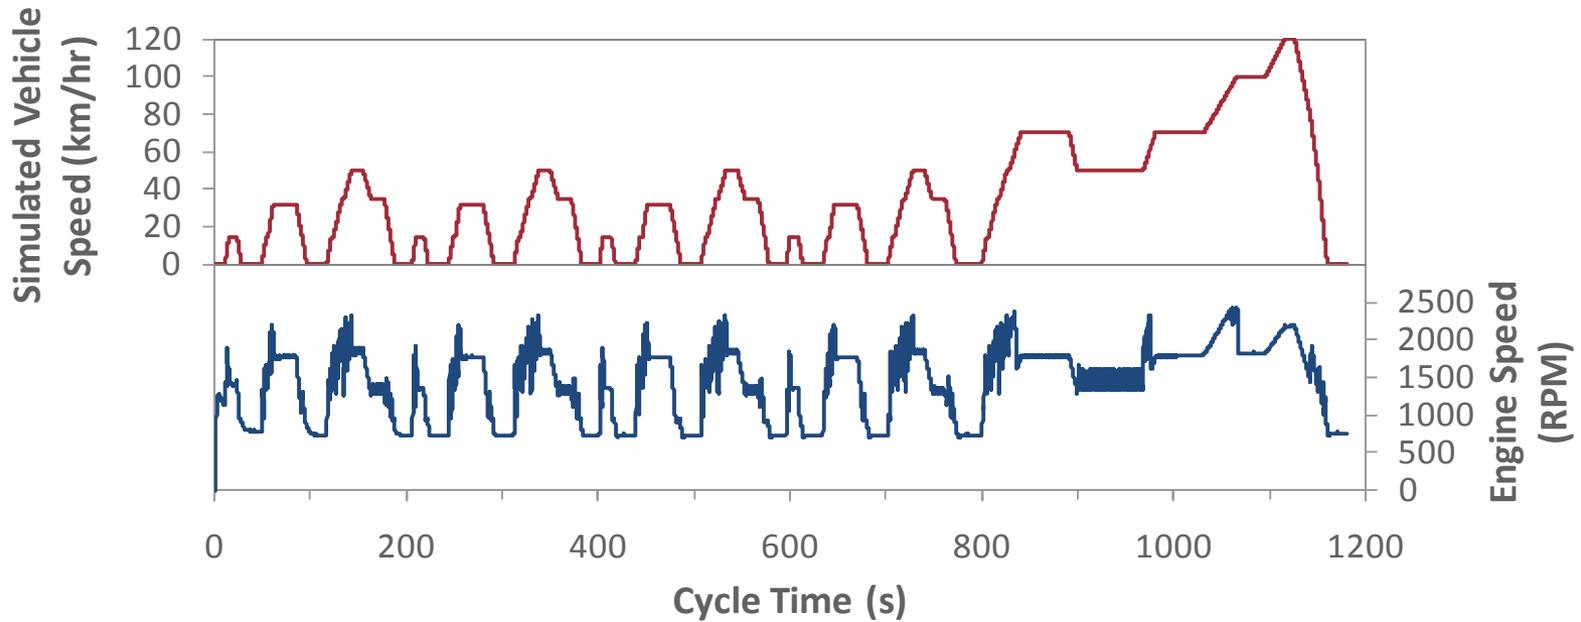

Fuel Consumption



	Vehicle	Engine HIL
ECE-15	11.3	12.4
EUDC	6.1	6.5
NEDC	8.0	8.7
	l/100km	l/100km

**Gasoline
Validation**

Emissions


	Euro 4	Engine HIL
NOx	> 0.1	0.02 ± 0.01
CO	> 1	0.7 ± 0.2
HC	> 0.068	0.03 ± 0.01
	g/km	g/km

Cycle Fuel and Energy Consumption

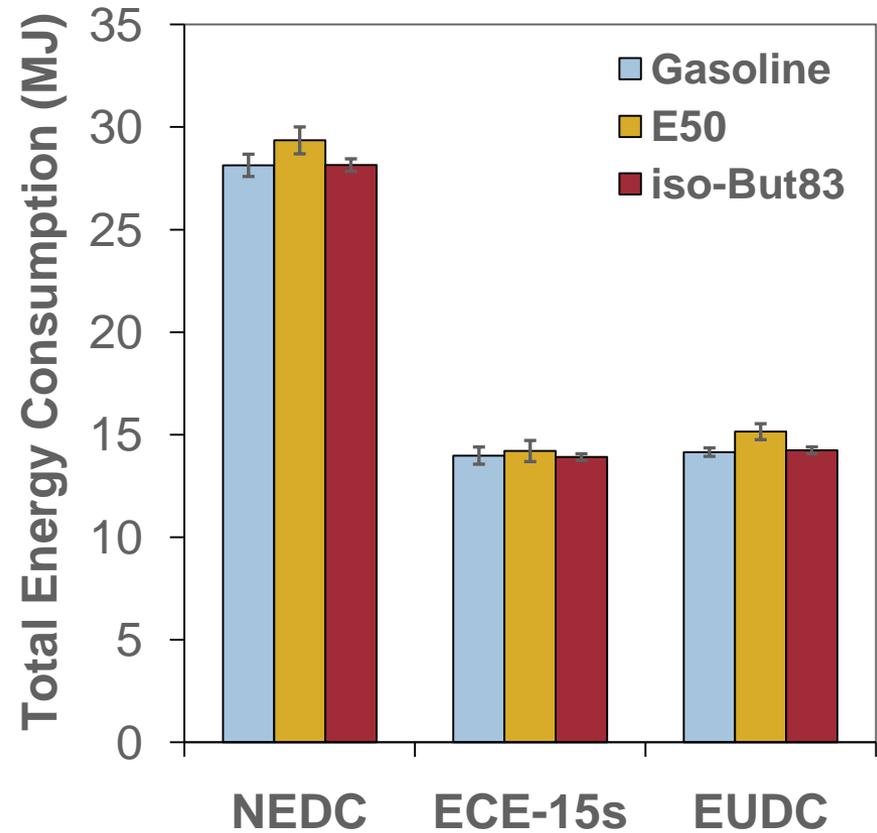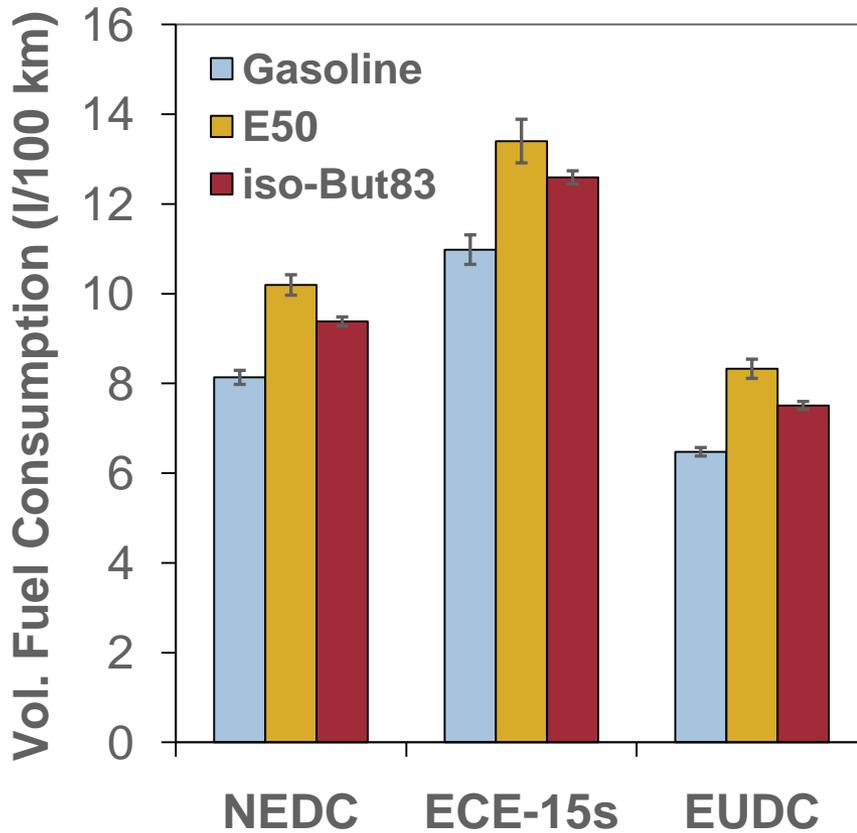


Hot-start cycles, integrated fuel flow

Total Cycle Emissions Mass

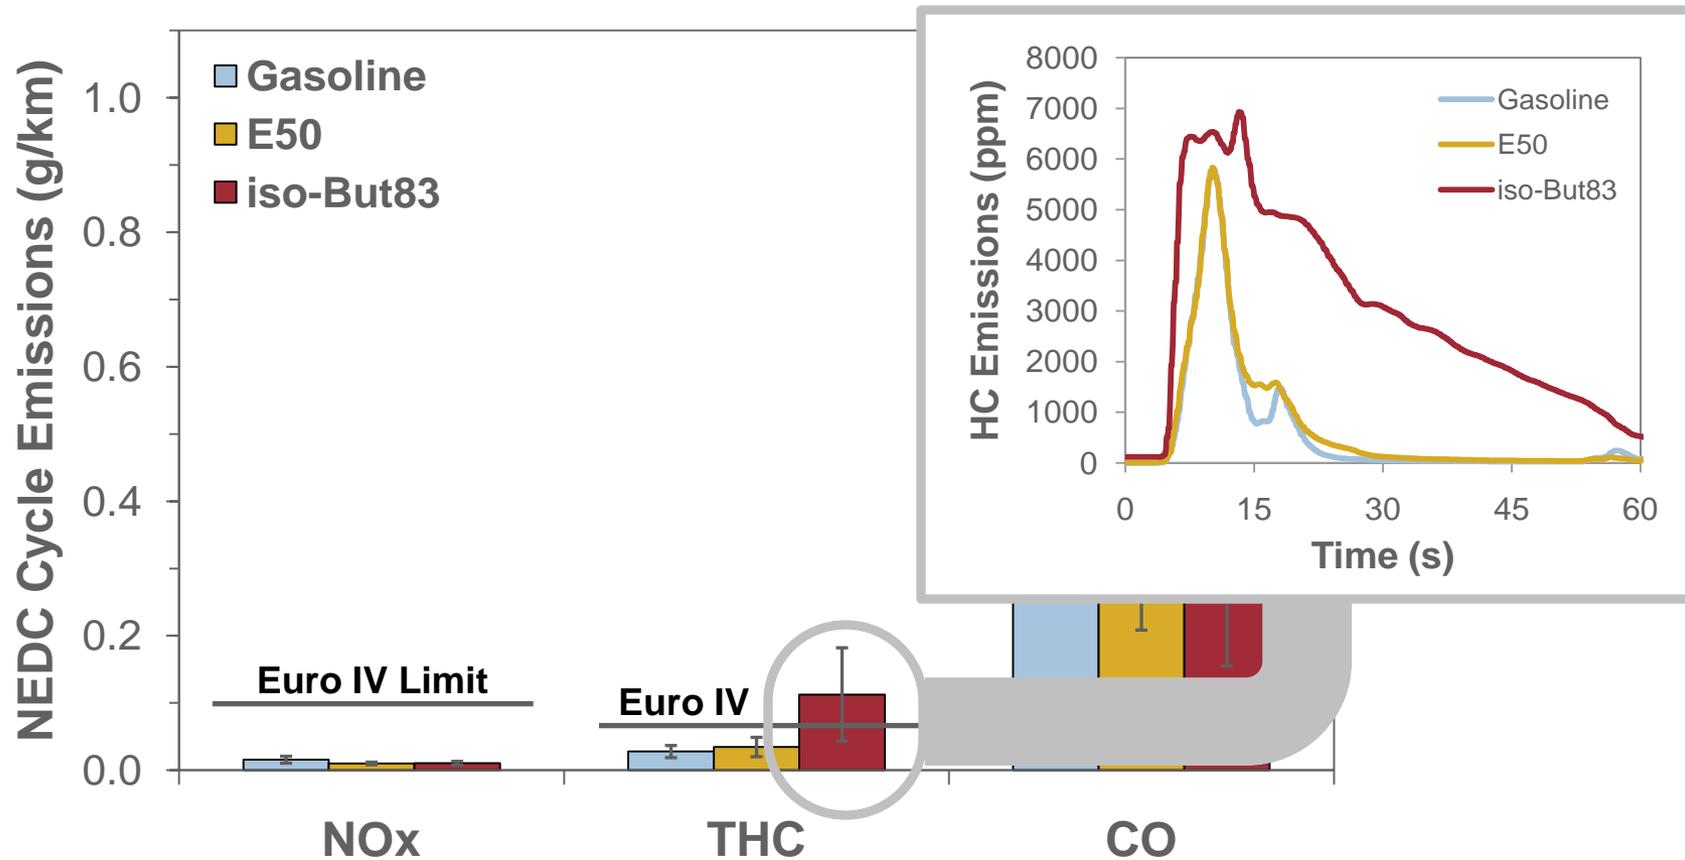


NEDC, cold-start, post-TWC emissions

Formaldehyde Emissions: Hot-Start, Pre-TWC

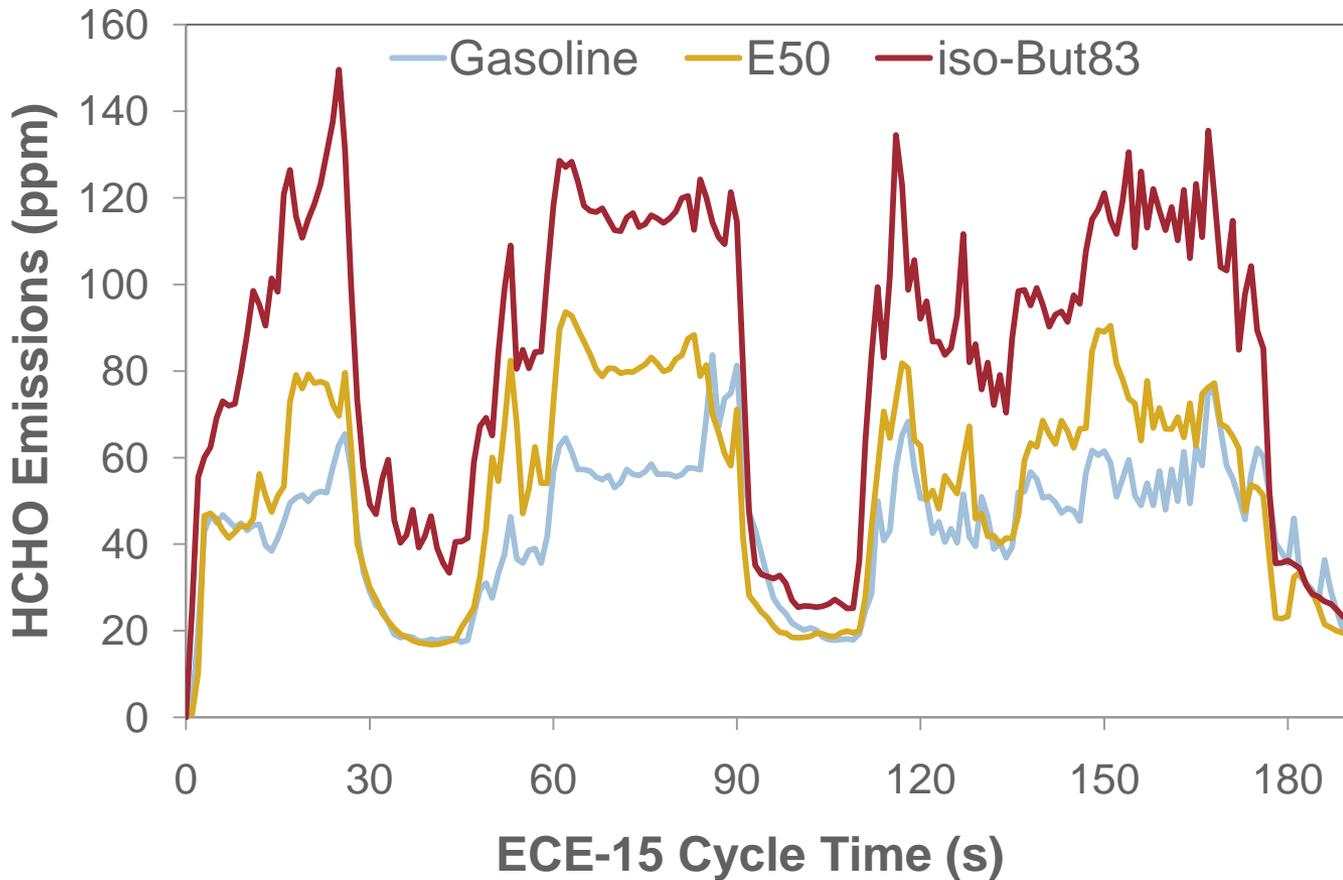


1st urban cycle of NEDC, hot-start, pre-TWC emissions

Formaldehyde Emissions: Cold-Start, Post-TWC

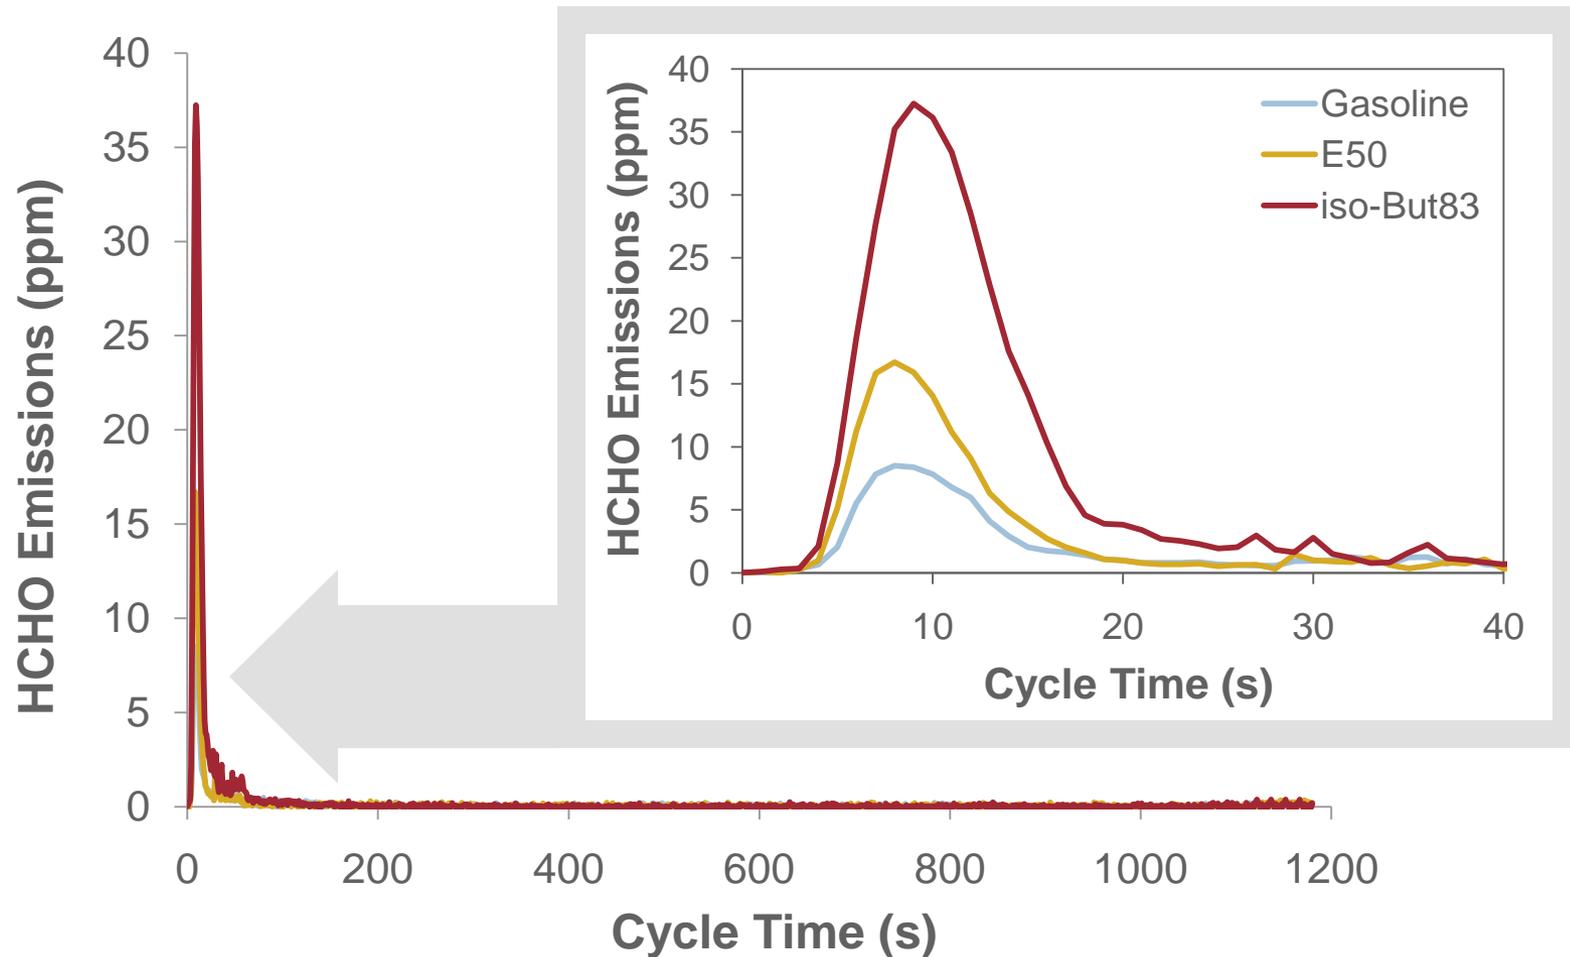


	Gasoline	E50	iso-But83
Cycle mass HCHO emitted (mg/km)	1.5	2.0	7.0

Acetaldehyde Emissions: Hot-Start, Pre-TWC

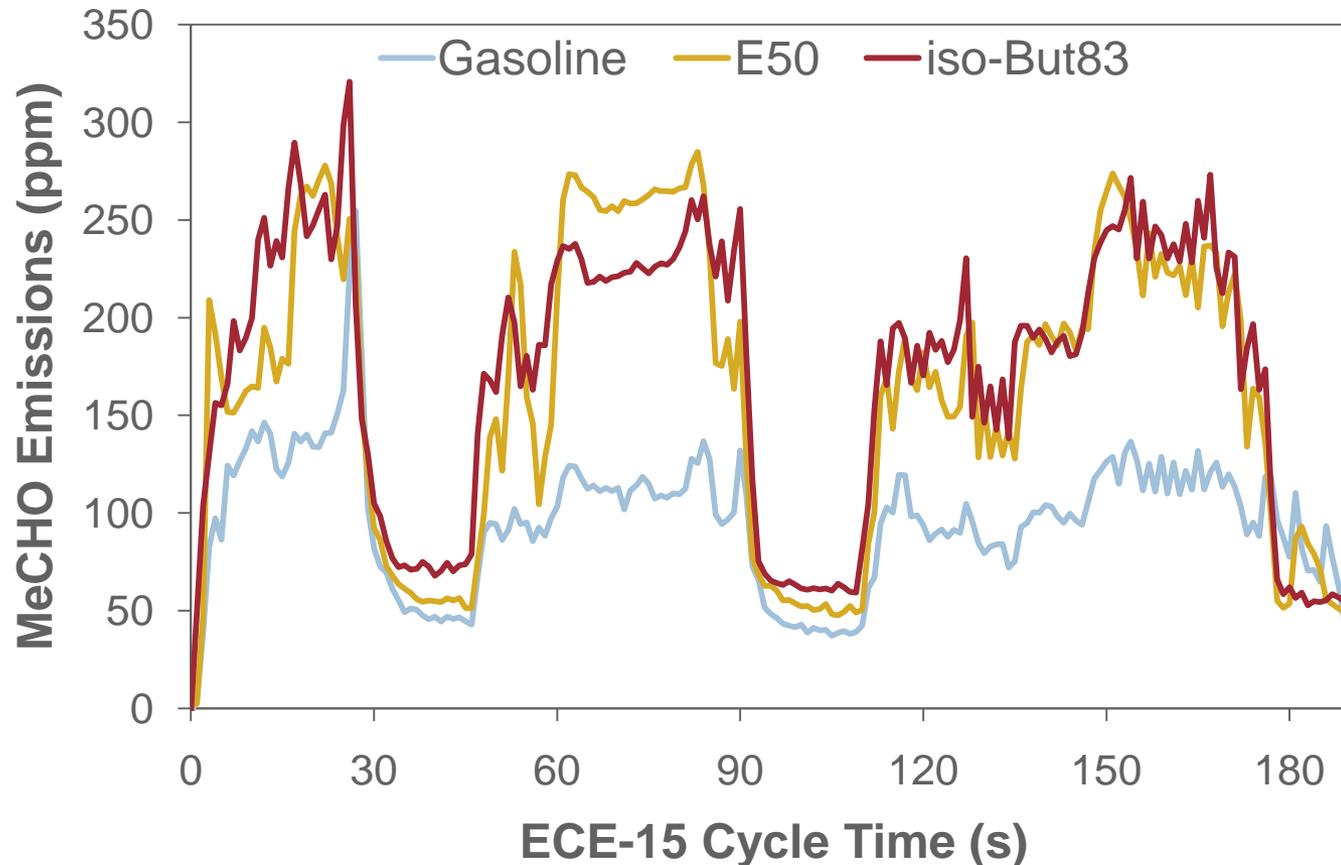

1st urban cycle of NEDC, hot-start, pre-TWC emissions

Acetaldehyde Emissions: Cold-Start, Post-TWC

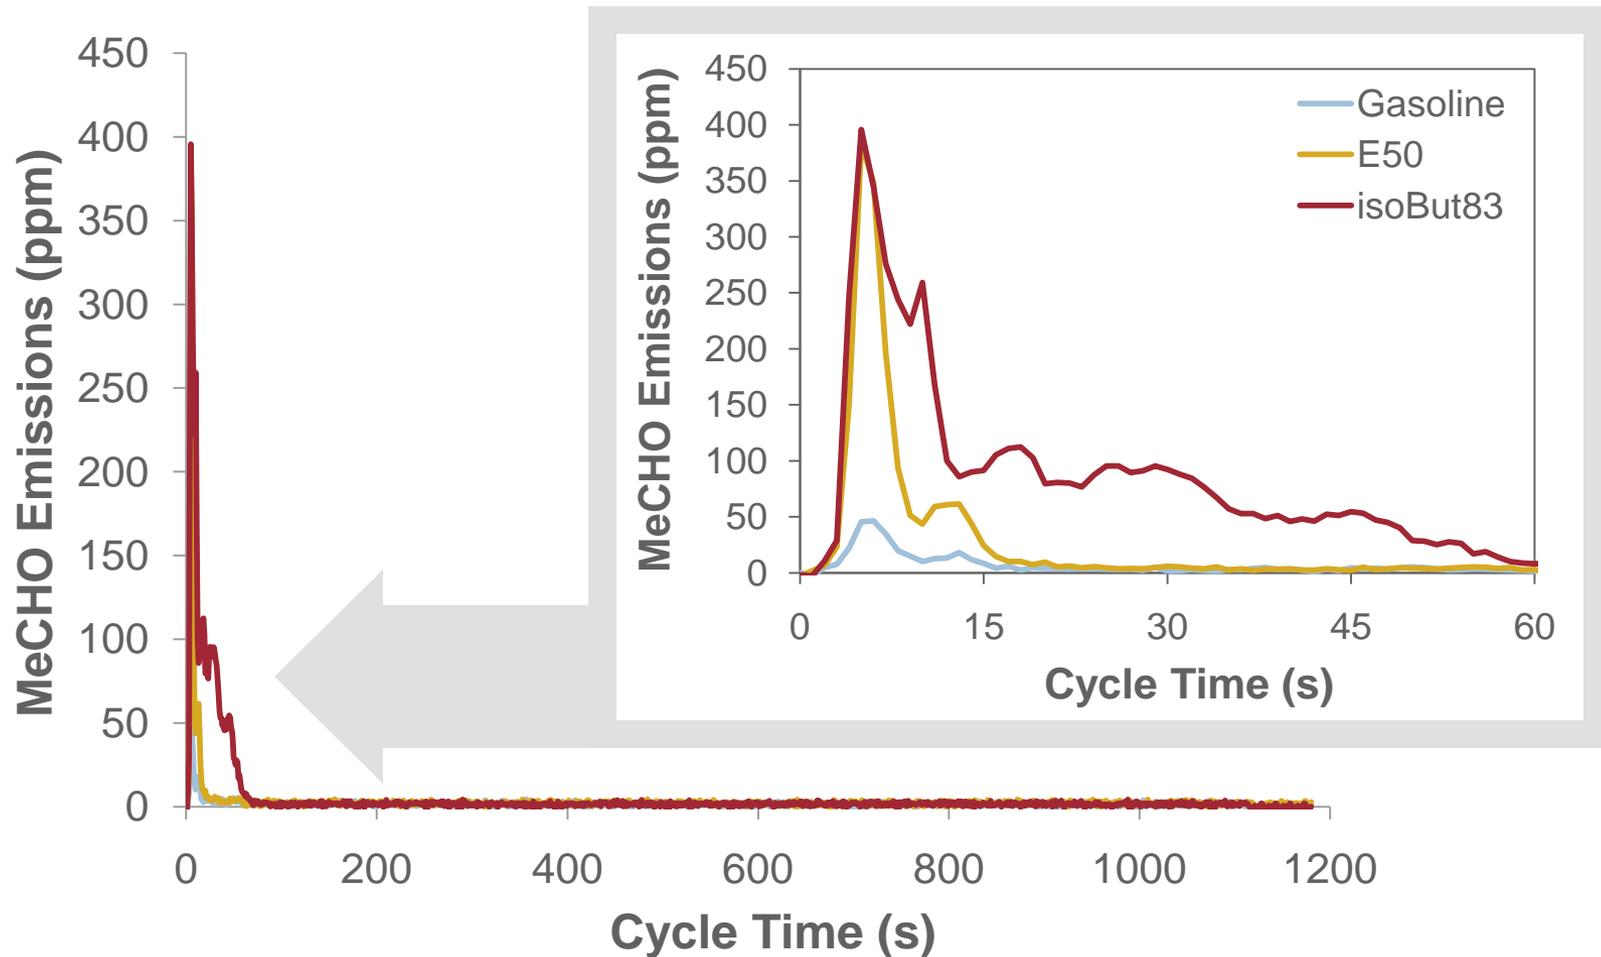

	Gasoline	E50	iso-But83
Cycle mass MeCHO emitted (mg/km)	10	40	110

Conclusions & Future Opportunities

- Both ethanol and *iso*-butanol blends reduced cycle mass emissions of NO_x and CO, and yield comparable cycle energy consumption.
- Blends of gasoline and *iso*-butanol increase both acetaldehyde and formaldehyde emissions, while ethanol-gasoline blends increase acetaldehyde emissions, but not significantly formaldehyde.
- Aldehyde emissions are eliminated in an active (warm) three-way catalyst: cycle aldehyde emissions stem from initial cold-start phase.
- Improved cold-start engine operation with high-alcohol fuels (including *iso*-butanol blends) is critical for meeting emissions targets
- Future exploration opportunities include particulate matter characterization from alcohol fuels utilizing engine HIL.

Impact of ethanol and butanol as oxygenates on SIDI engine efficiency and emissions using steady-state and transient test procedures

Thomas Wallner, Neeraj Shidore, Andrew Ickes
Argonne National Laboratory

16th Directions in Engine-Efficiency and Emissions Research (DEER) Conference
Detroit, Michigan

September 27-30, 2010