Argonne NATIONAL LABORATORY

... for a brighter future

PHEVs Component Requirements and Efficiencies

2009 DOE Hydrogen Program and Vehicle Technologies Annual Merit Review

May 19, 2009

Phil Sharer, Aymeric Rousseau

Argonne National Laboratory

Sponsored by Lee Slezak

U.S. Department of Energy

UChicago Argonne LLC

Office of Science U.S. DEPARTMENT OF ENERGY

A U.S. Department of Energy laboratory managed by UChicago Argonne, LLC

U.S. Department of Energy

Energy Efficiency and Renewable Energy

Bringing you a prosperous future where energy is clean, abundant, reliable, and affordable

This presentation does not contain any proprietary, confidential, or otherwise restricted information

Main Objectives

- Define targets for the different technical teams.
- How does each assumption influence the component requirements?
- Can we lower a component requirement without significant fuel economy loss?
- What are the most appropriate battery energy/power to maximize fuel displacement?
- What is the best control strategy philosophy for different battery characteristics?
- What should the cost targets be to have specific payback?

Milestones

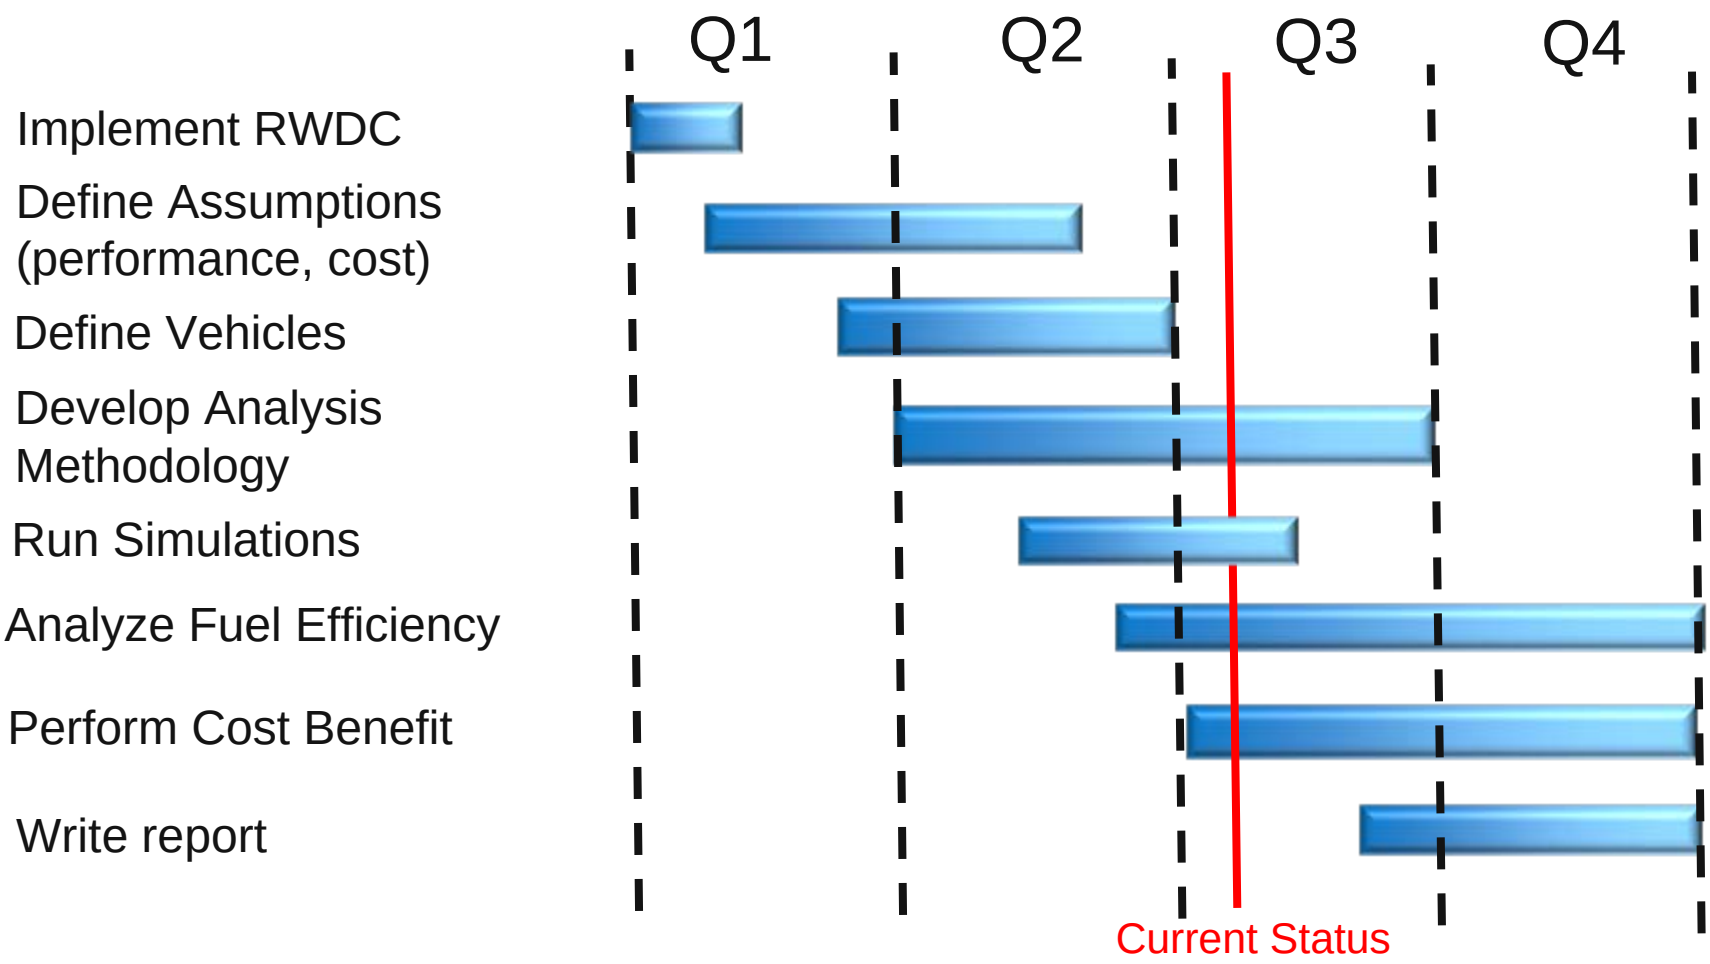
Q1
Q2
Q3
Q4
Implement RWDC
Define Assumptions (performance, cost)
Define Vehicles
Develop Analysis Methodology
Run Simulations
Analyze Fuel Efficiency
Perform Cost Benefit
Write report
Current Status

Approach

Real World Drive Cycles

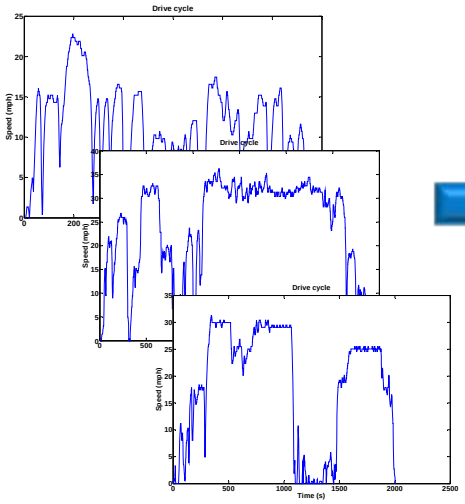

>110 Trips
One day in
Kansas City

Automated Sizing

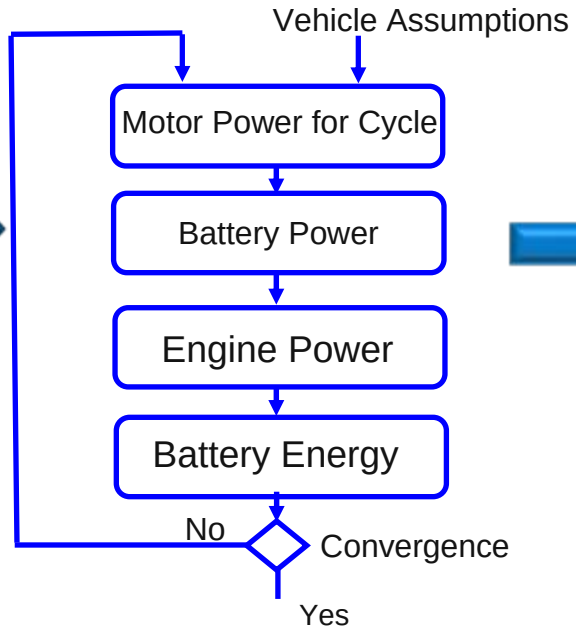

Midsize Vehicle

Analysis (Distribution)

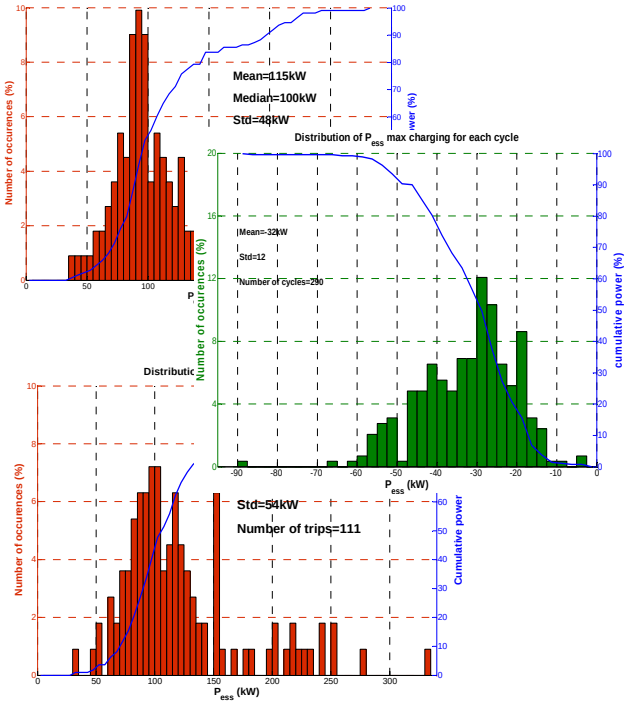

Only Hot Conditions Assumed, no Grade!

Battery Power and Usable Energy Requirement as a Function of Vehicle Mass

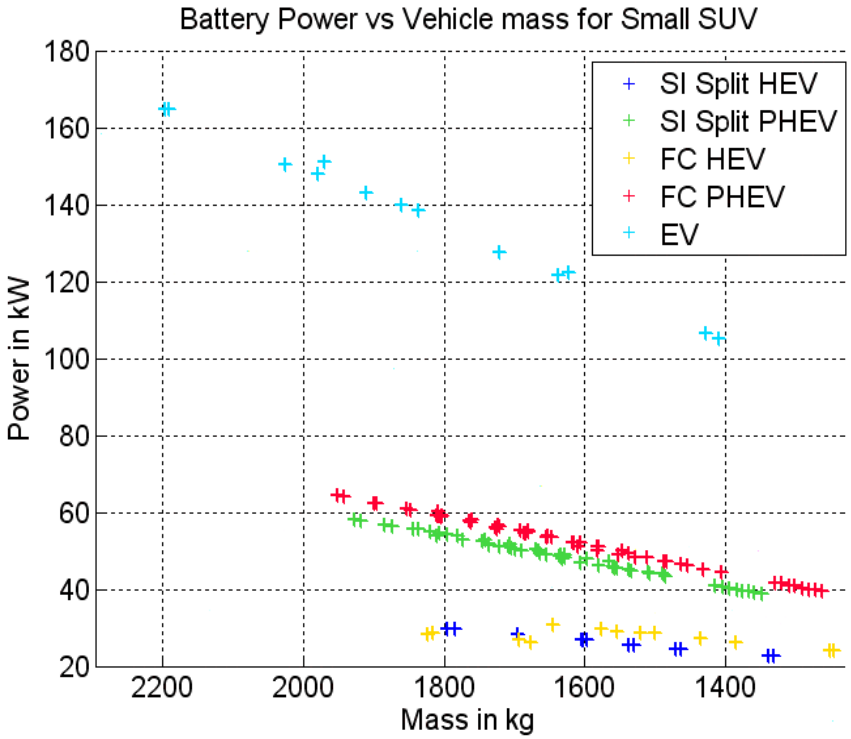

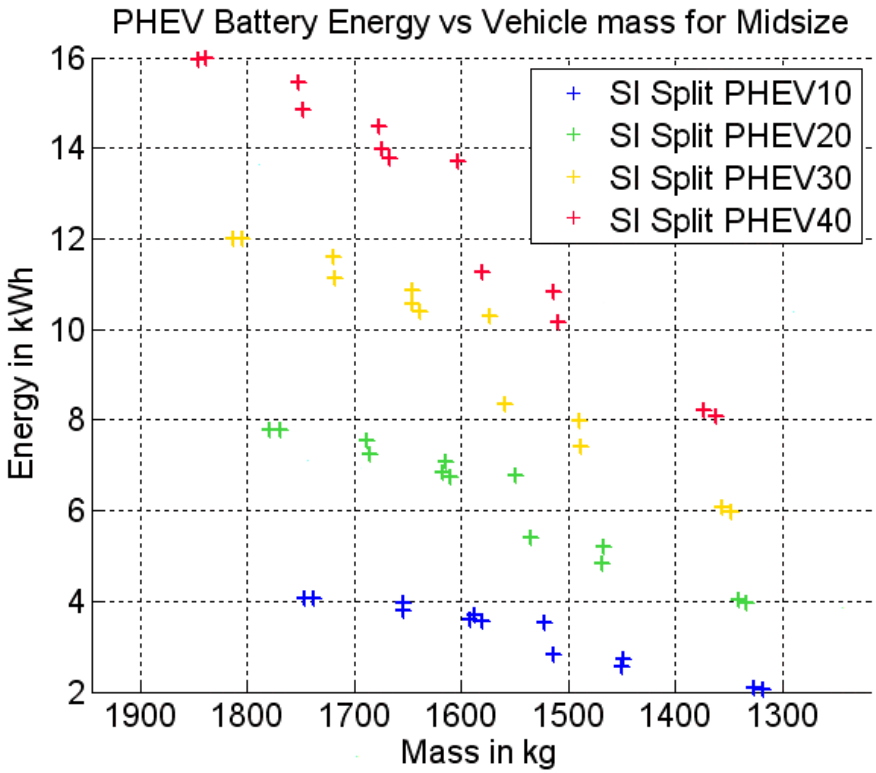

Engine Power Requirements Provided to the Engine Tech. Team

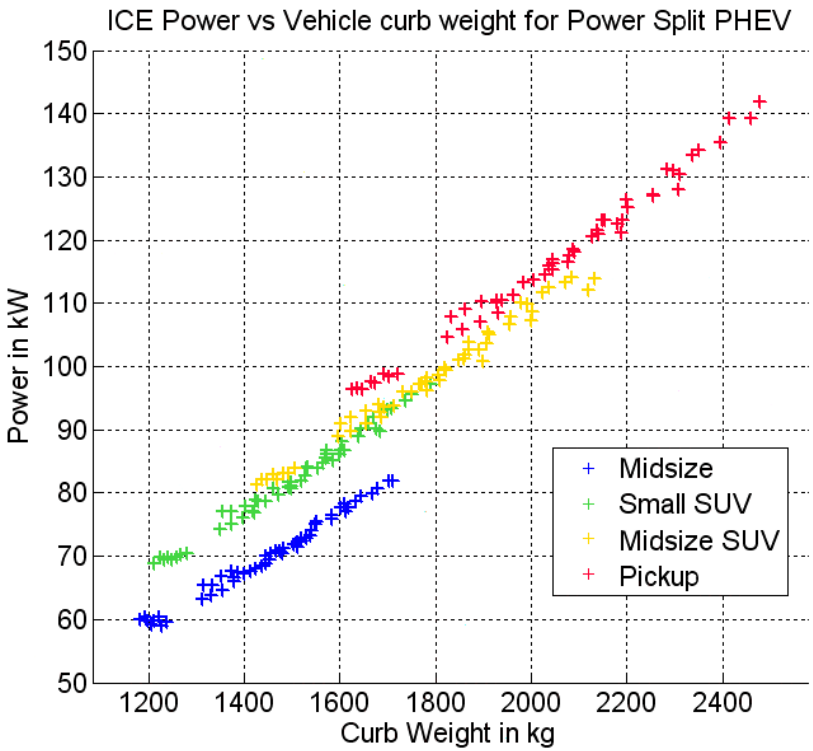

Engine Power
per vehicle classes

Engine Power
per vehicle configuration

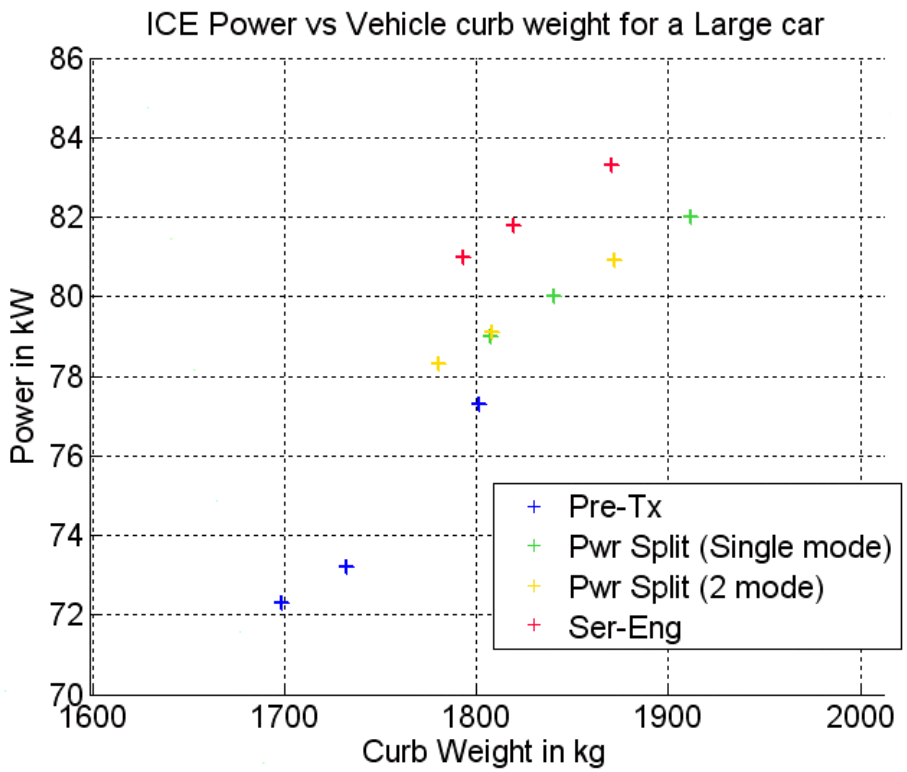

Different PHEV Powertrains and Battery Sizes

Powertrain Configuration	Battery Energy	PHEV Class
Power Split PHEV	**4 kWh** **8 kWh**	**Low Energy PHEV**
Series PHEV	**12 kWh** **16 kWh**	**High Energy PHEV**

Kernel Density Used to Compare Options

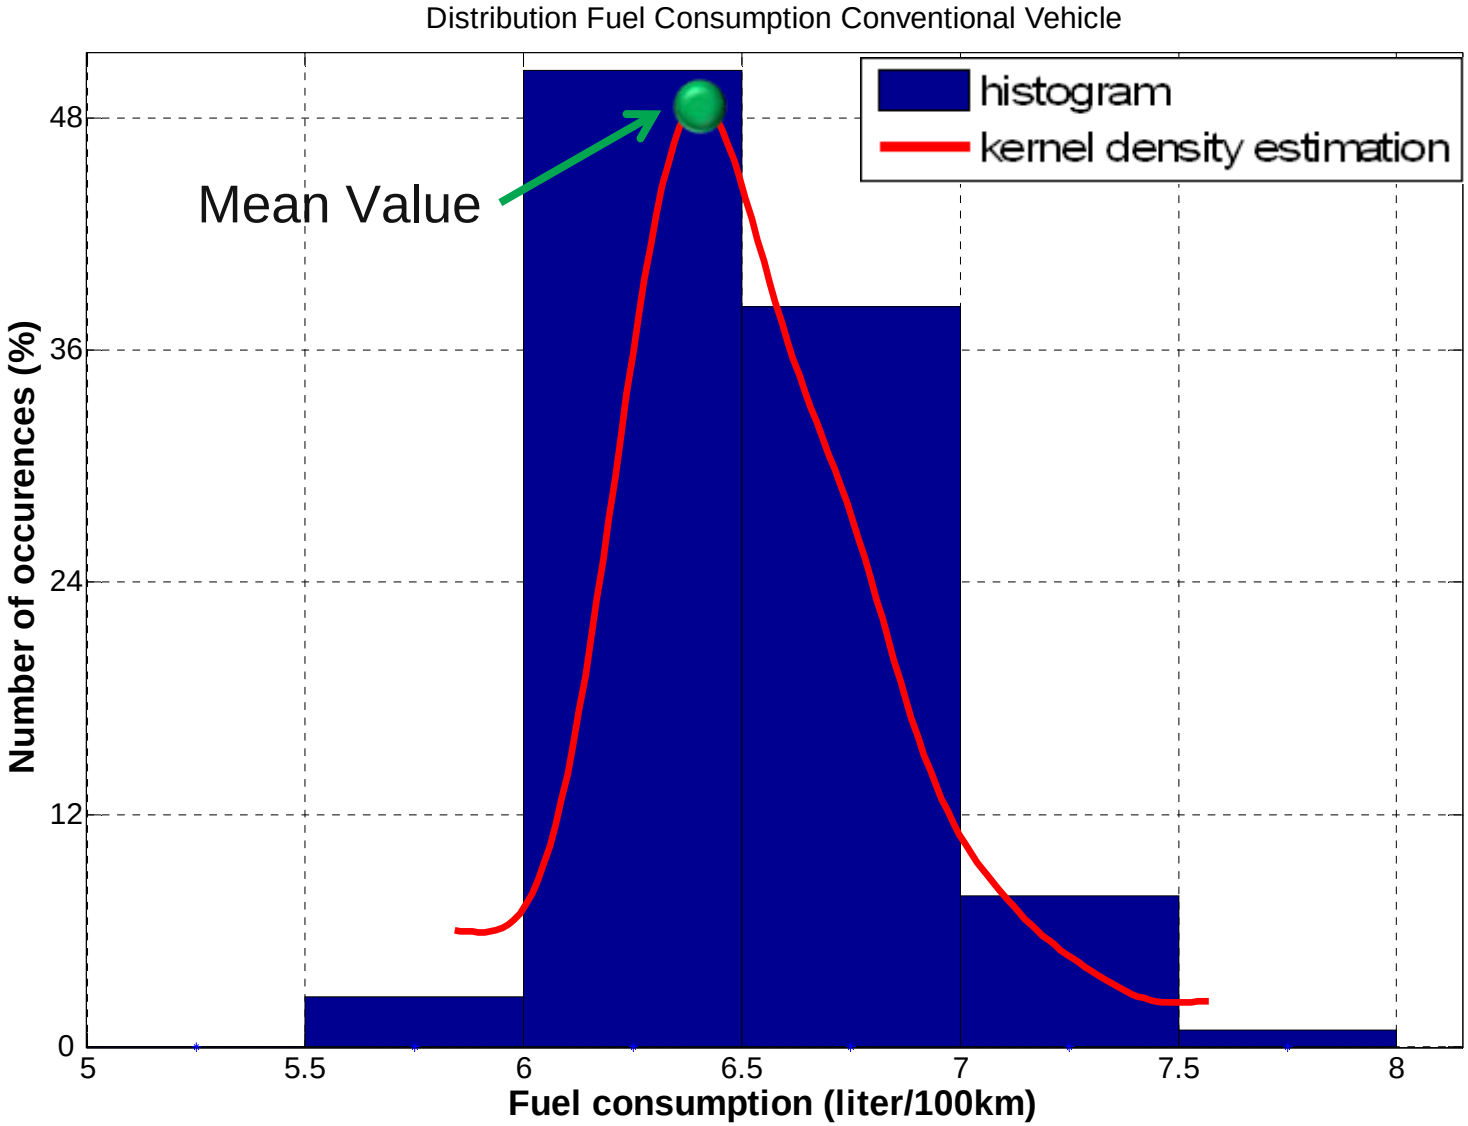

One Control per Configuration was Selected Based on a Fuel Economy and Number of Engine Starts - Criteria

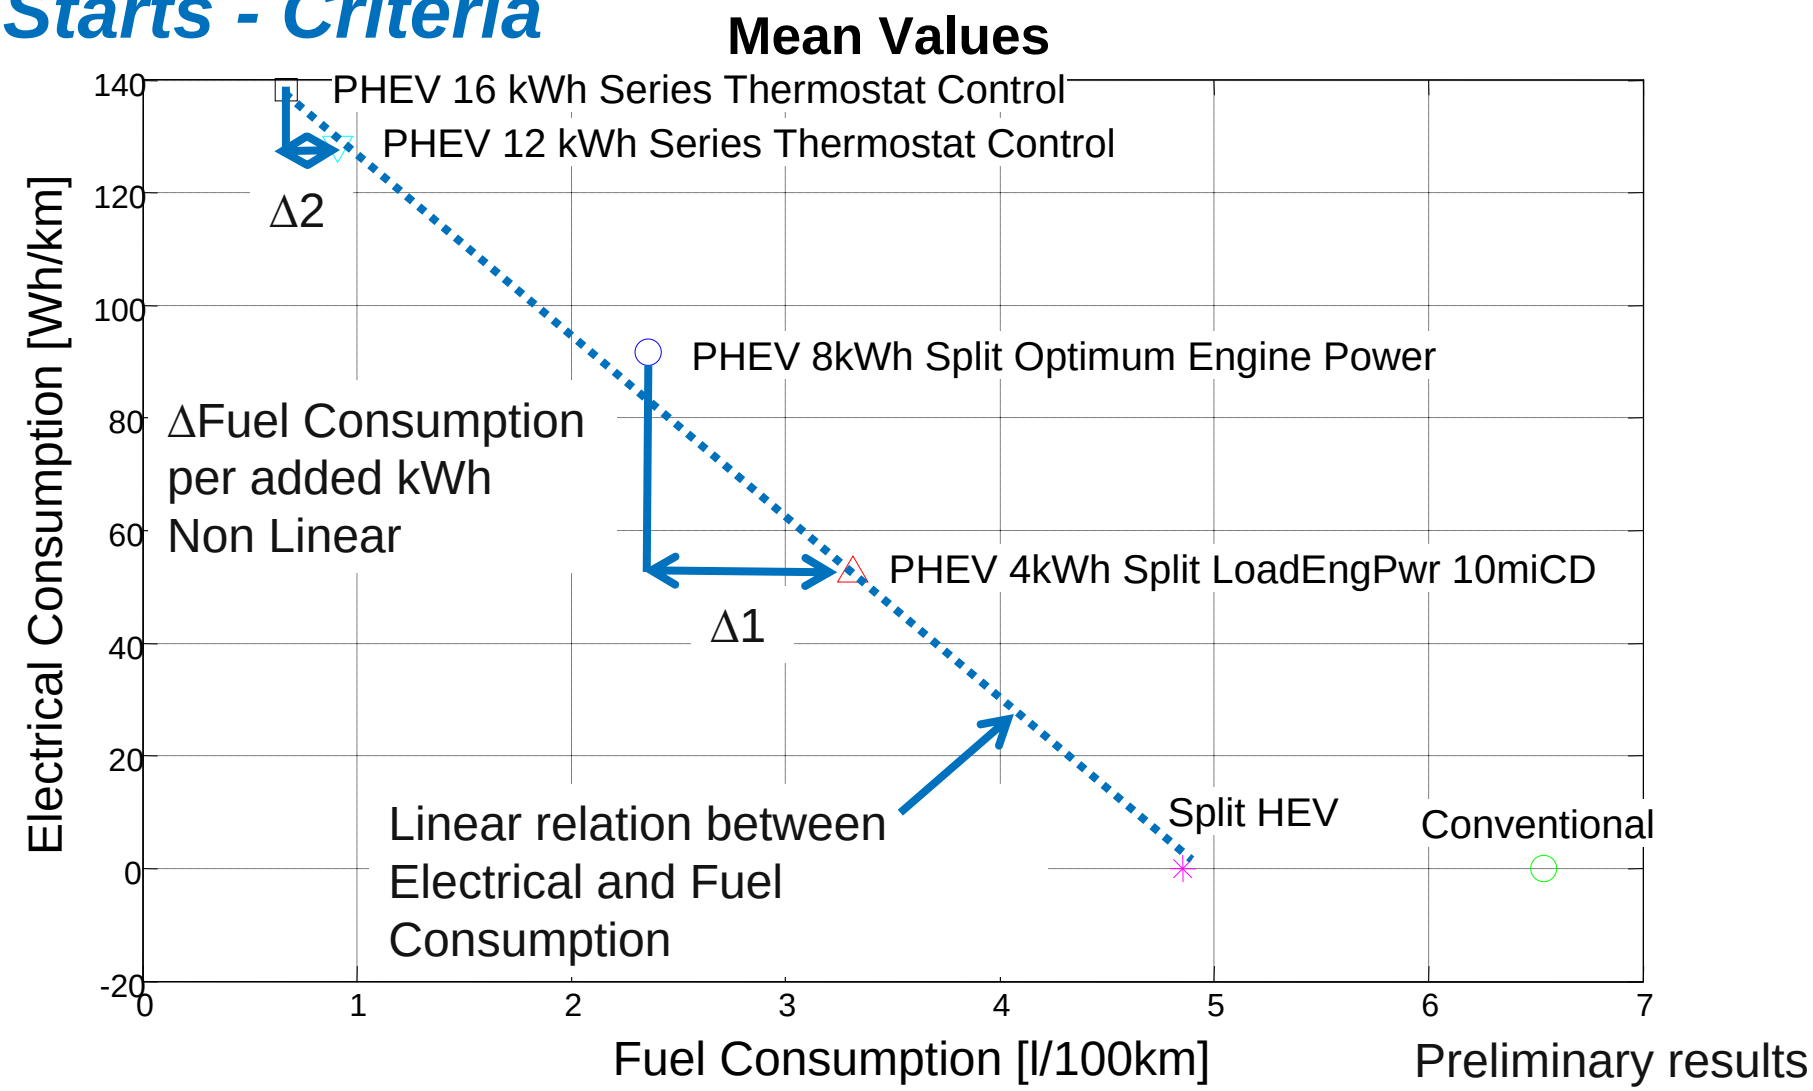

Preliminary results

Fuel Consumption Lowers with Increasing Battery Energy

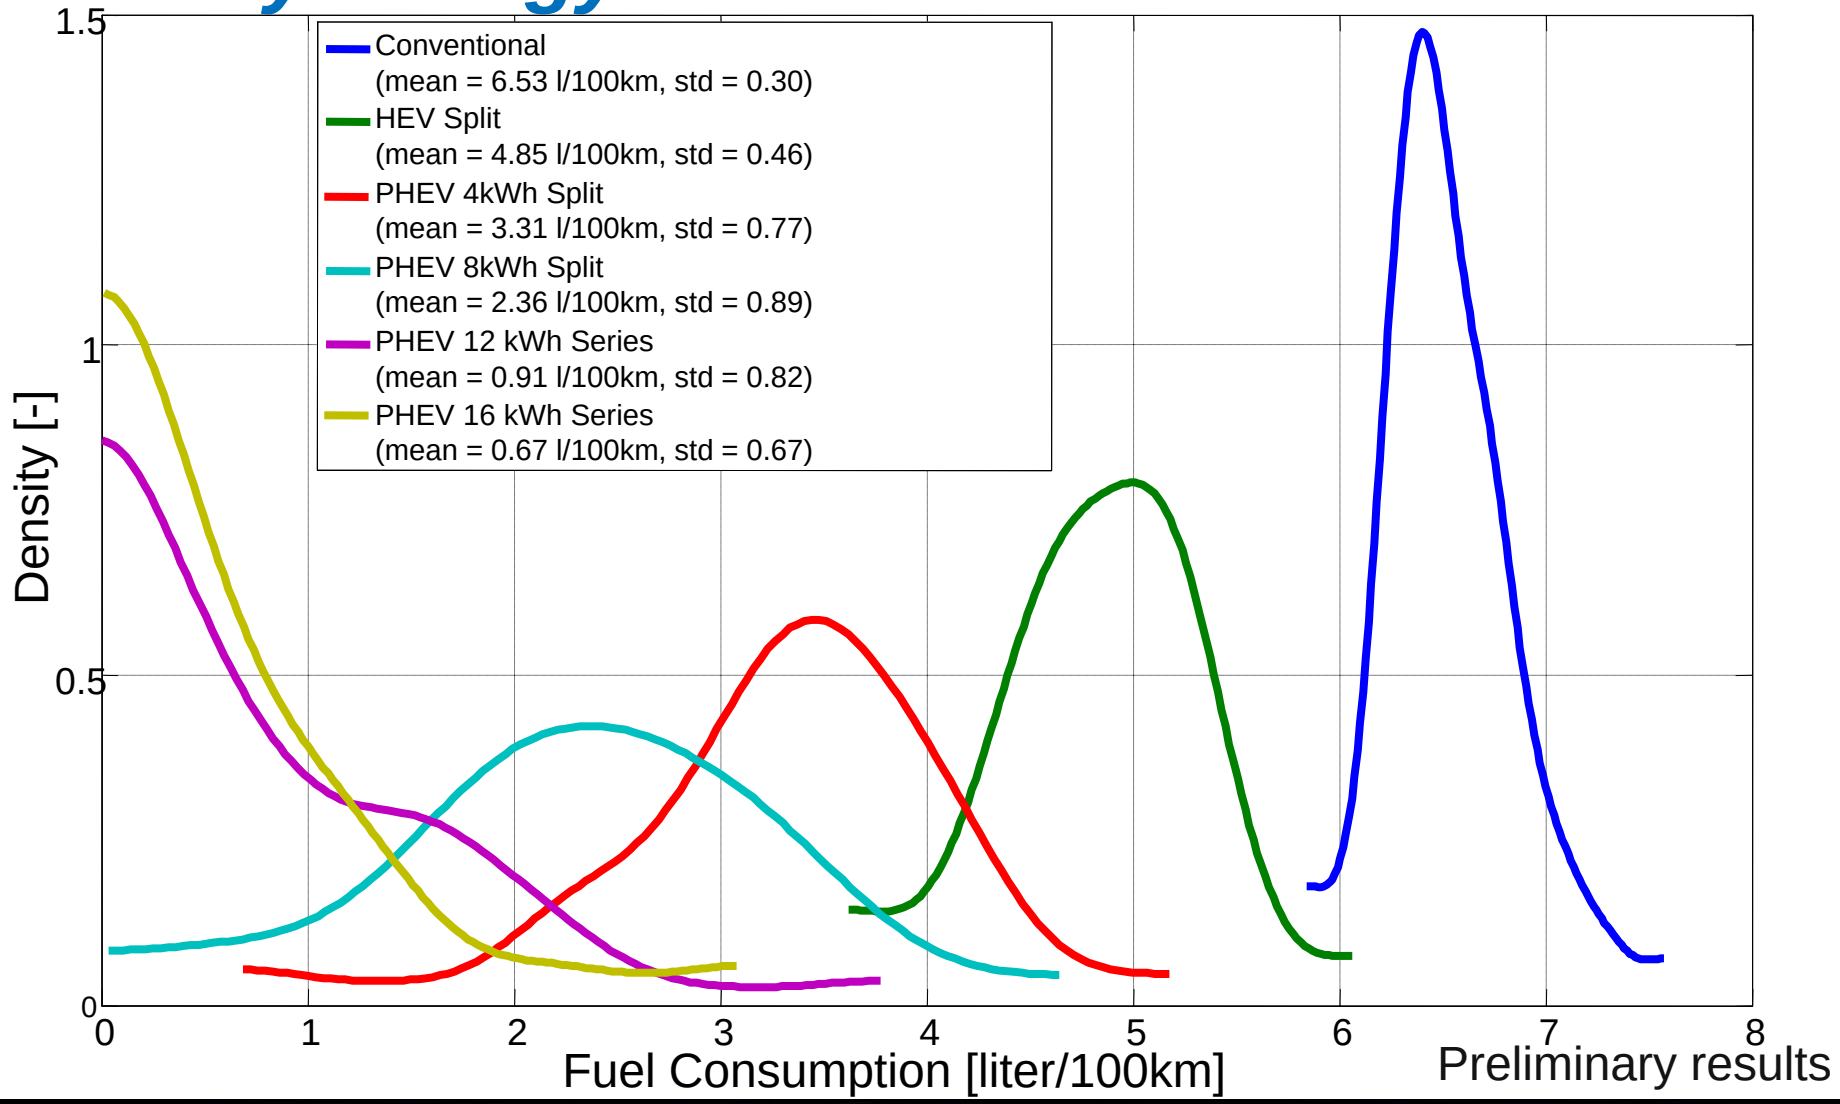

Preliminary results

Battery Usage Linked to Usable Energy -> Different Impact on Life for Different Energies

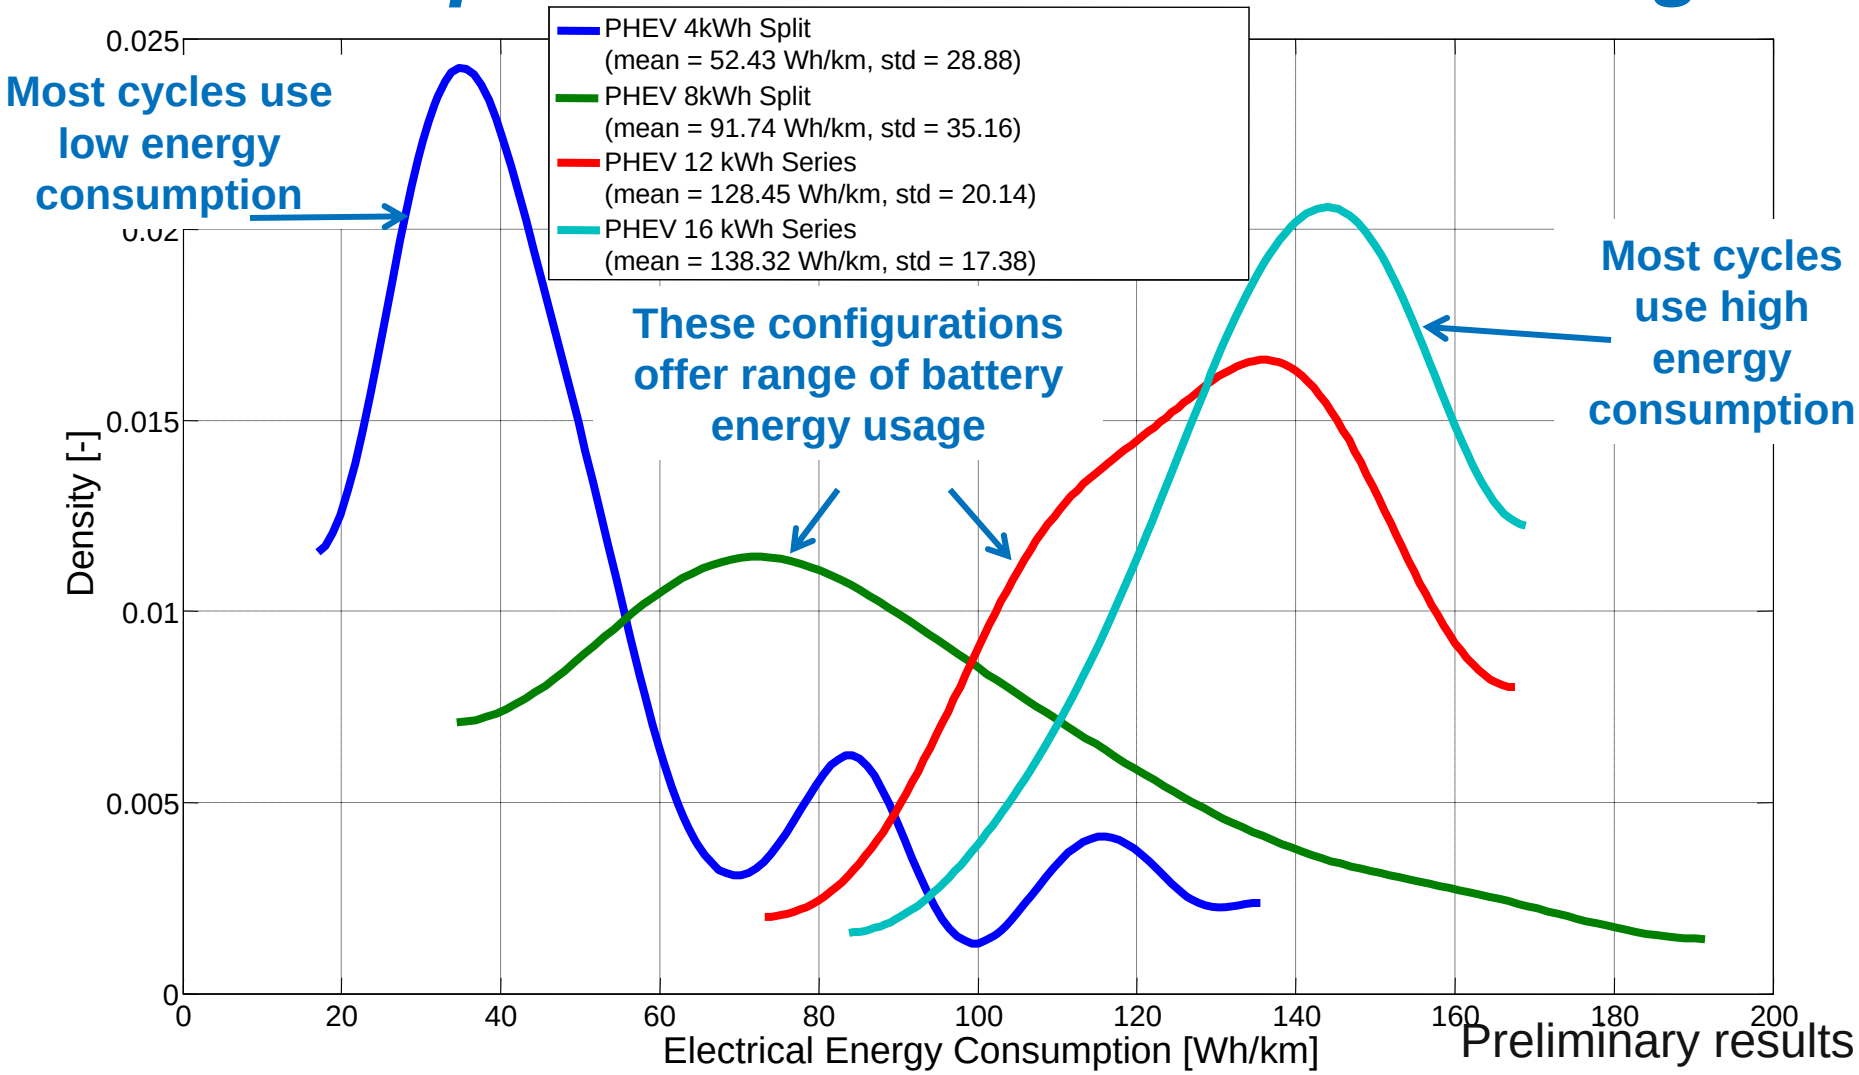

Preliminary results

4kWh Battery Energy Provides 50% of the Gains Achieved with 16 kWh Battery

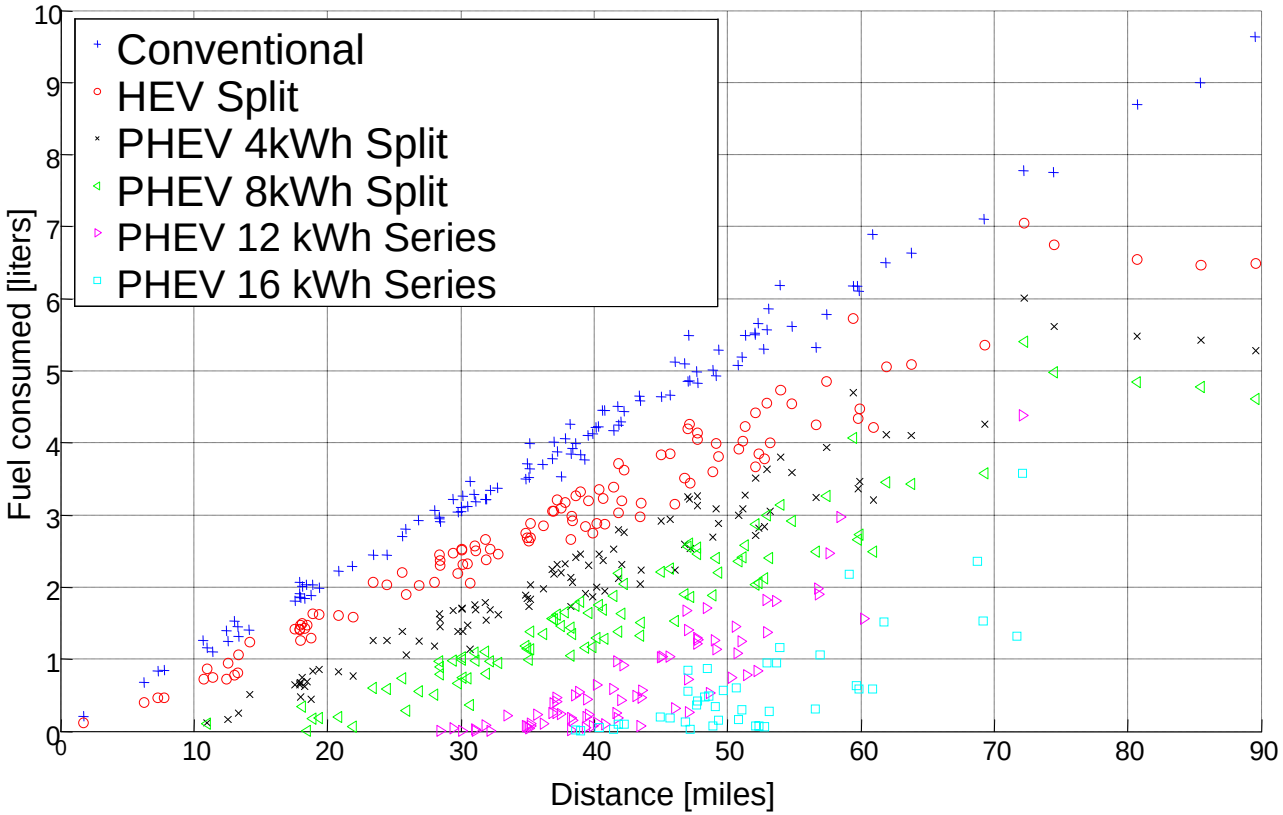

$\sum_{conv}$ 449.16 Liters

$\sum_{HEV}$ 339 Liters (24.5%)

$\sum_{split4kWh}$ 239.7 Liters (−46.6%)

$\sum_{split8kWh}$ 169.8 Liters (−62.2%)

$\sum_{series12kWh}$ 53.5 Liters (−88%)

$\sum_{series16kWh}$ 26.2 Liters (−94.1%)

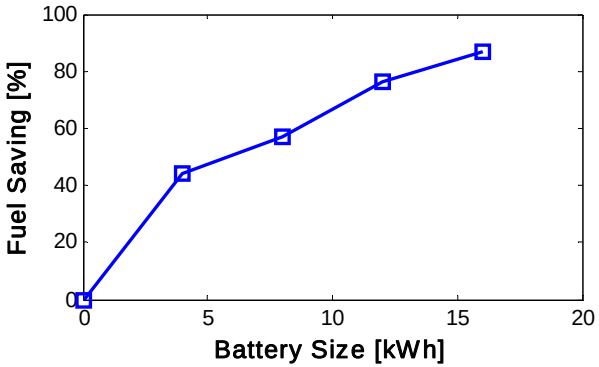

Preliminary results

Used Battery Energy as a Function of Driving Distance

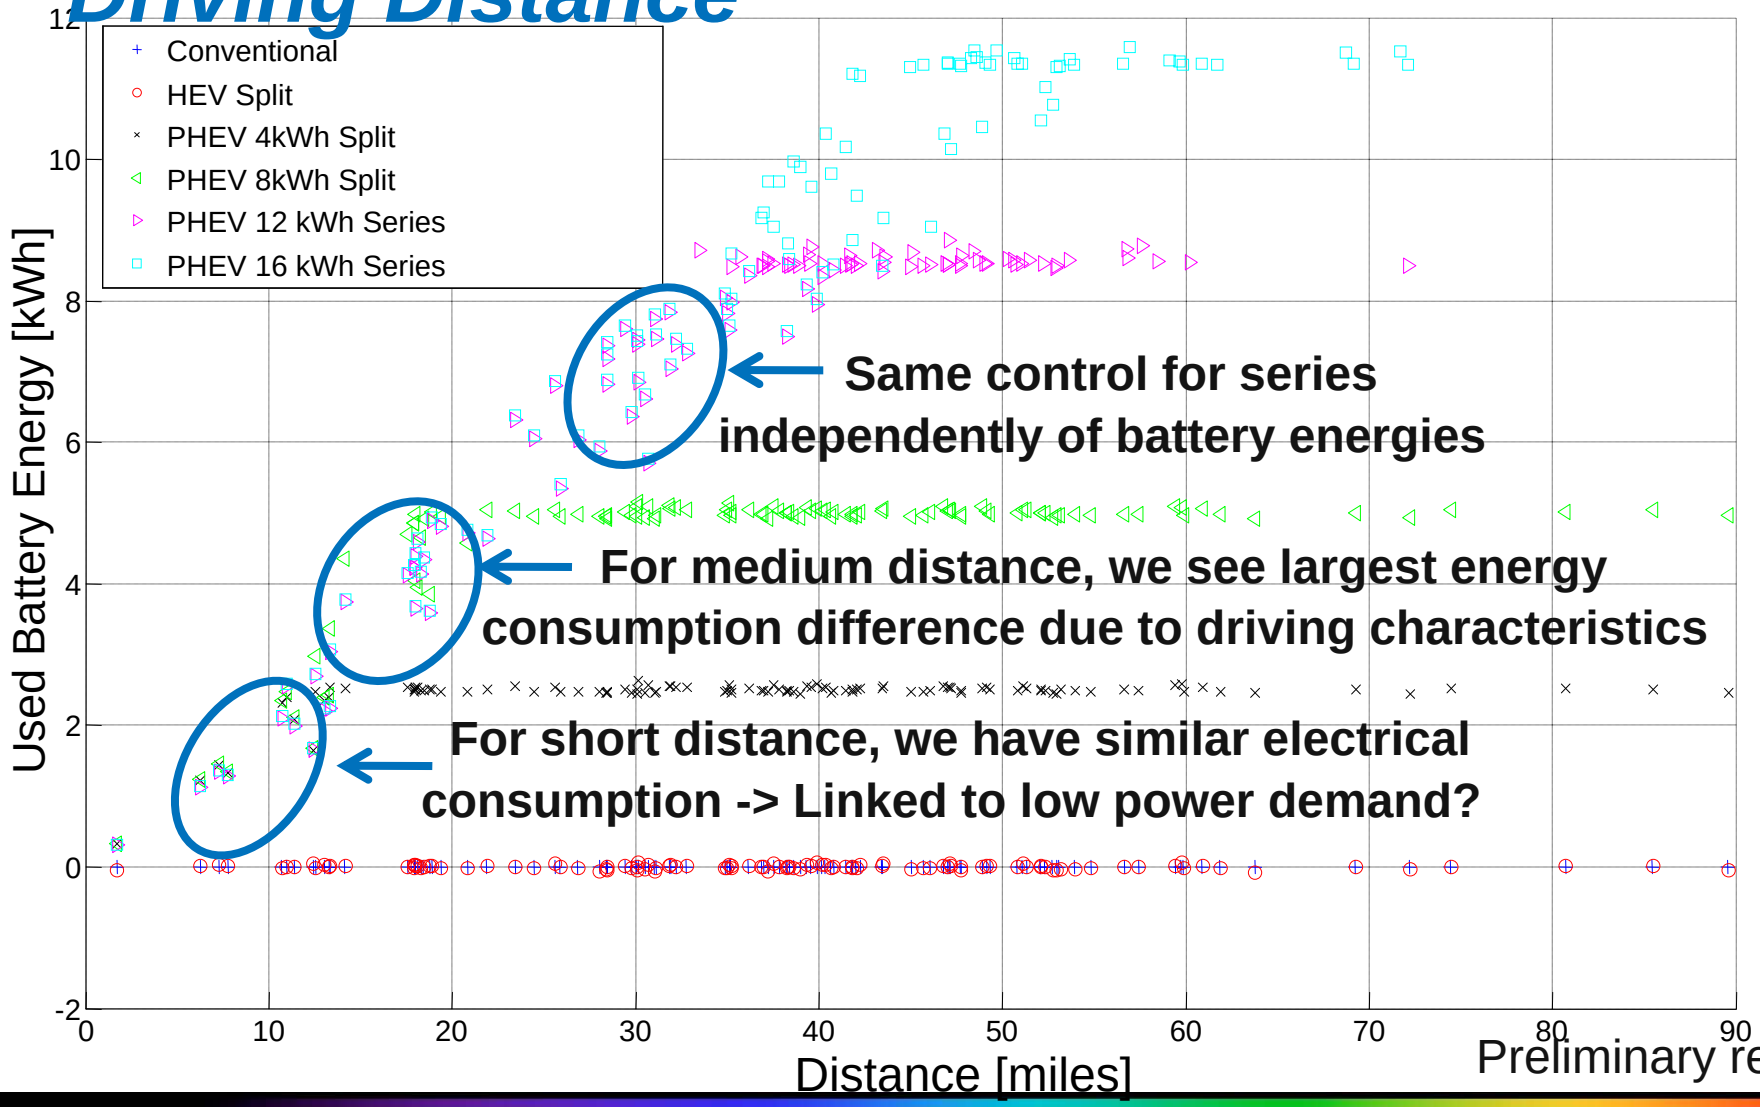

Preliminary results

Constant Payback Period Requires Longer Driving Distances for Bigger Battery Packs

- Equation for break even lines with conventional vehicle:

$$t_{breakeven} = \frac{C_{Veh2} - C_{Veh1}}{C_{fuel} * \left[Cons_{fuel,Veh1}(d) - Cons_{fuel,Veh2}(d)\right] + C_{elec} * \left[Cons_{elec,Veh1}(d) - Cons_{elec,Veh2}(d)\right]}$$

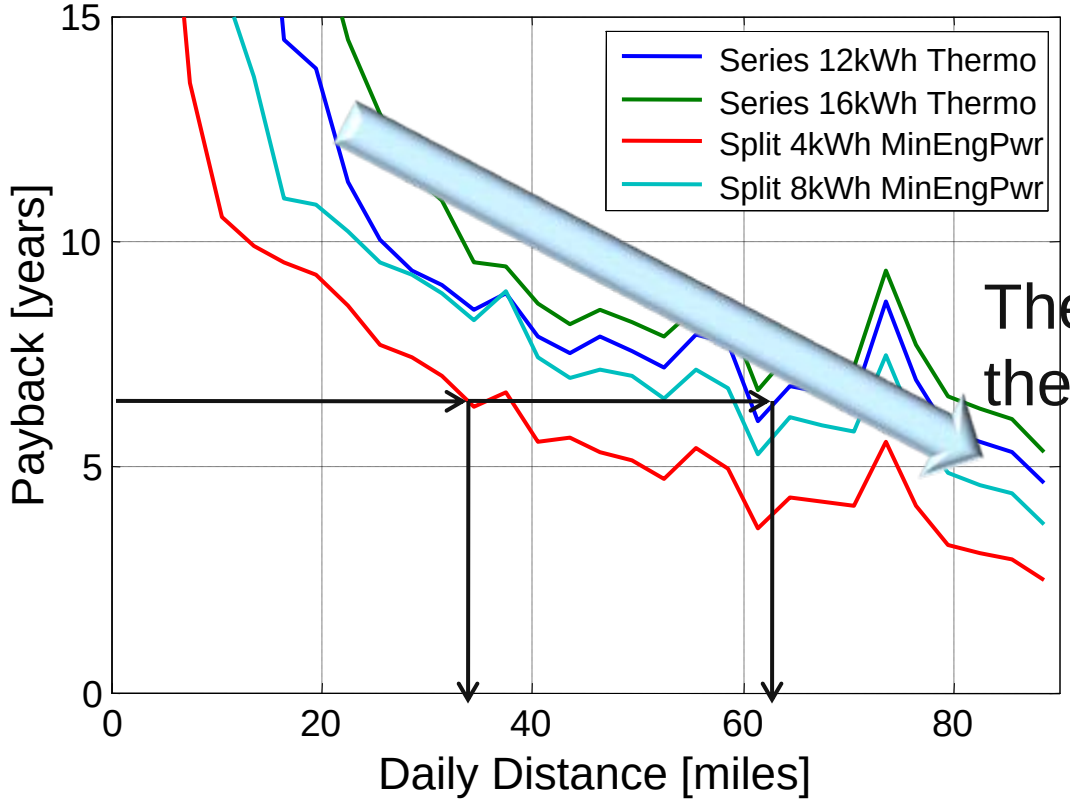

The further you drive, the better the payback

C_{elec} = 0.07 \$/kWh

C_{fuel} = 3\$/gallon

Preliminary results

Fuel Price Significantly Influences Payback Period

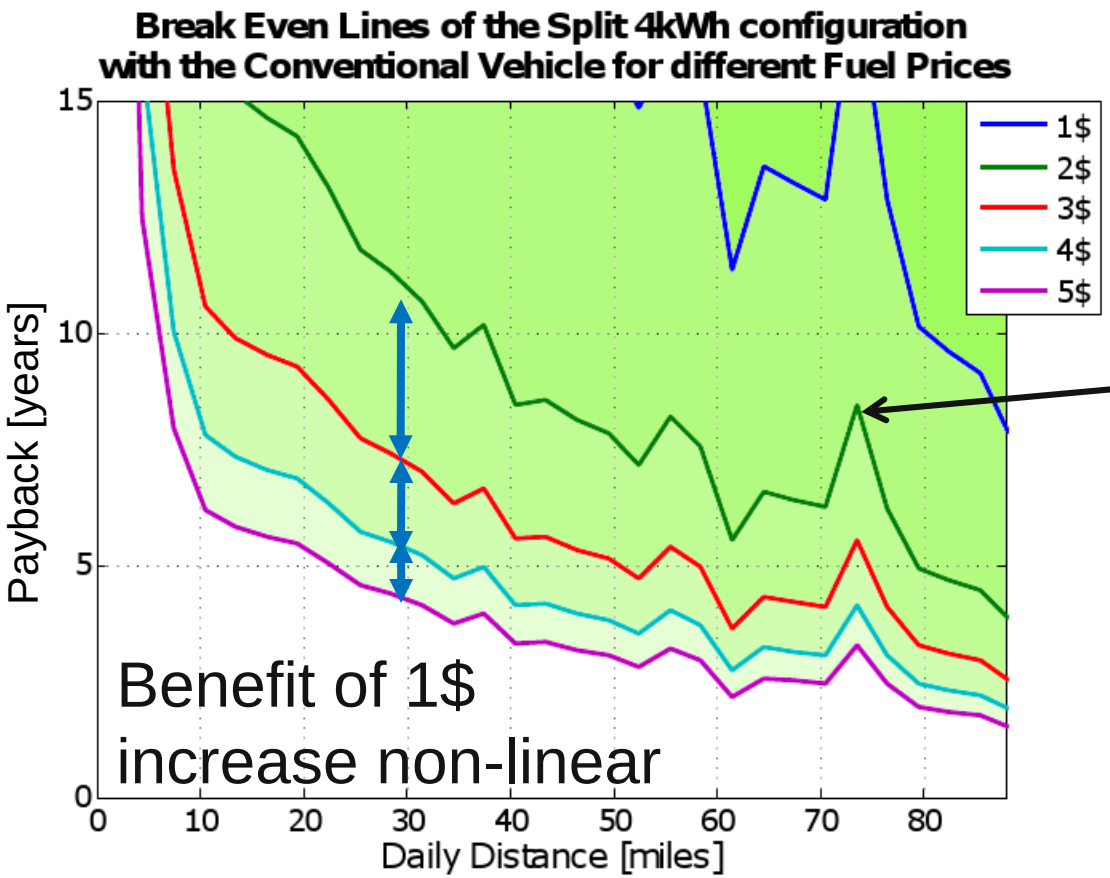

Spikes due to small number of data points for long distances

C_{elec} = 0.07 $/kWh

$C_{battery}$ = 4128 $ (1000$/kWh)

C_{base} = 30791 $

Preliminary results

Future Activities

- Update the cost assumptions based on litterature search and expert discussions (D. Santini & A. Vyas).
- Complete fuel efficiency and cost analysis
- Add HEV vehicle
- Perform cost benefit analysis based on several scenarios to define the most approriate vehicle for different options (i.e., battery energy, battery cost, distance, fuel cost...).
- What is the impact of assuming the vehicle can be charged during the day?
- How does the results based on the RDWC compare with the latest J1711 Procedure (using both National and RWDC Utility Factors).
- Perform MonteCarlo analysis on the control strategy parameters to provide an uncertainty value.

Summary

- **Impact of RWDC on Fuel Efficiency**
  - Several vehicles with different powertrain configurations and battery energies were simulated.
  - A single control strategy was selected for each option based on a combination of fuel efficiency and engine ON/OFF criteria.
  - The fuel efficiency was compared with a conventional vehicle to assess the potential fuel displacement over the Kansas City RWDC.

- **Impact of RWDC on Cost Benefit Analysis**
  - With current pricing, long payback period due to high battery cost
  - Increasing fuel price significantly influences payback period and is a major factor for the rentability of a PHEV
  - Benefits of price reduction on payback nonlinear
  - You should regularly drive longer than what your AER theoritically allows

References

- G. Singh, S. Hagspiel, M. Fellah, A. Rousseau, “Impact of RWDC on PHEVs fuel efficiency and cost for different powertrain and battery characteristics”, EVS 24, Norway, May 2009
- A. Rousseau, “Impact of Real-World Drive Cycles on PHEV Battery Requirements”, SAE 2009-01-1383, World Congress, April 2009
- A. Rousseau, S. Pagerit, M. Fellah, “PHEV Battery Requirements Uncertainty Based on Real World Drive Cycles”, EDTA, Dec 2008, DC
- A. Rousseau, N., Shidore, R., Carlson, D., Karbowski, “Impact of Battery Characteristics on PHEV Fuel Economy”, AABC 2008, Tampa (May 2008)
- J. Kwon, J. Kim, E. Fallas, S. Pagerit, and A. Rousseau , “Impact of Drive Cycles on PHEV Component Requirements”, SAE paper 2008-01-1337, SAE World Congress, Detroit (April 2008).
- A. Rousseau, N. Shidore, R. Carlson, V. Freyermuth, “Research on PHEV Battery Requirements and Evaluation of Early Prototypes, AABC 2007, Long Beach (May 16-18)

Additional Slides

Kernel Density Estimation

- KDE is a way to estimate probability density function of a random variable $X = x_1, x_2 \dots x_n$
- The estimated density at any point x is:

$$\hat{f}_h(x) = \frac{1}{Nh}\sum_{i=1}^{N} K\left(\frac{x - x_i}{h}\right)$$

  - K is corresponding to the Kernel Function, in our case K has been taken as a Gaussian function with mean zero and variance 1:

$$K(x) = \frac{1}{\sqrt{2\pi}} e^{-\frac{1}{2}x^2}$$

  - h is a smoothing parameter called the bandwith which influence a lot the quality of the Kernel Estimation.